



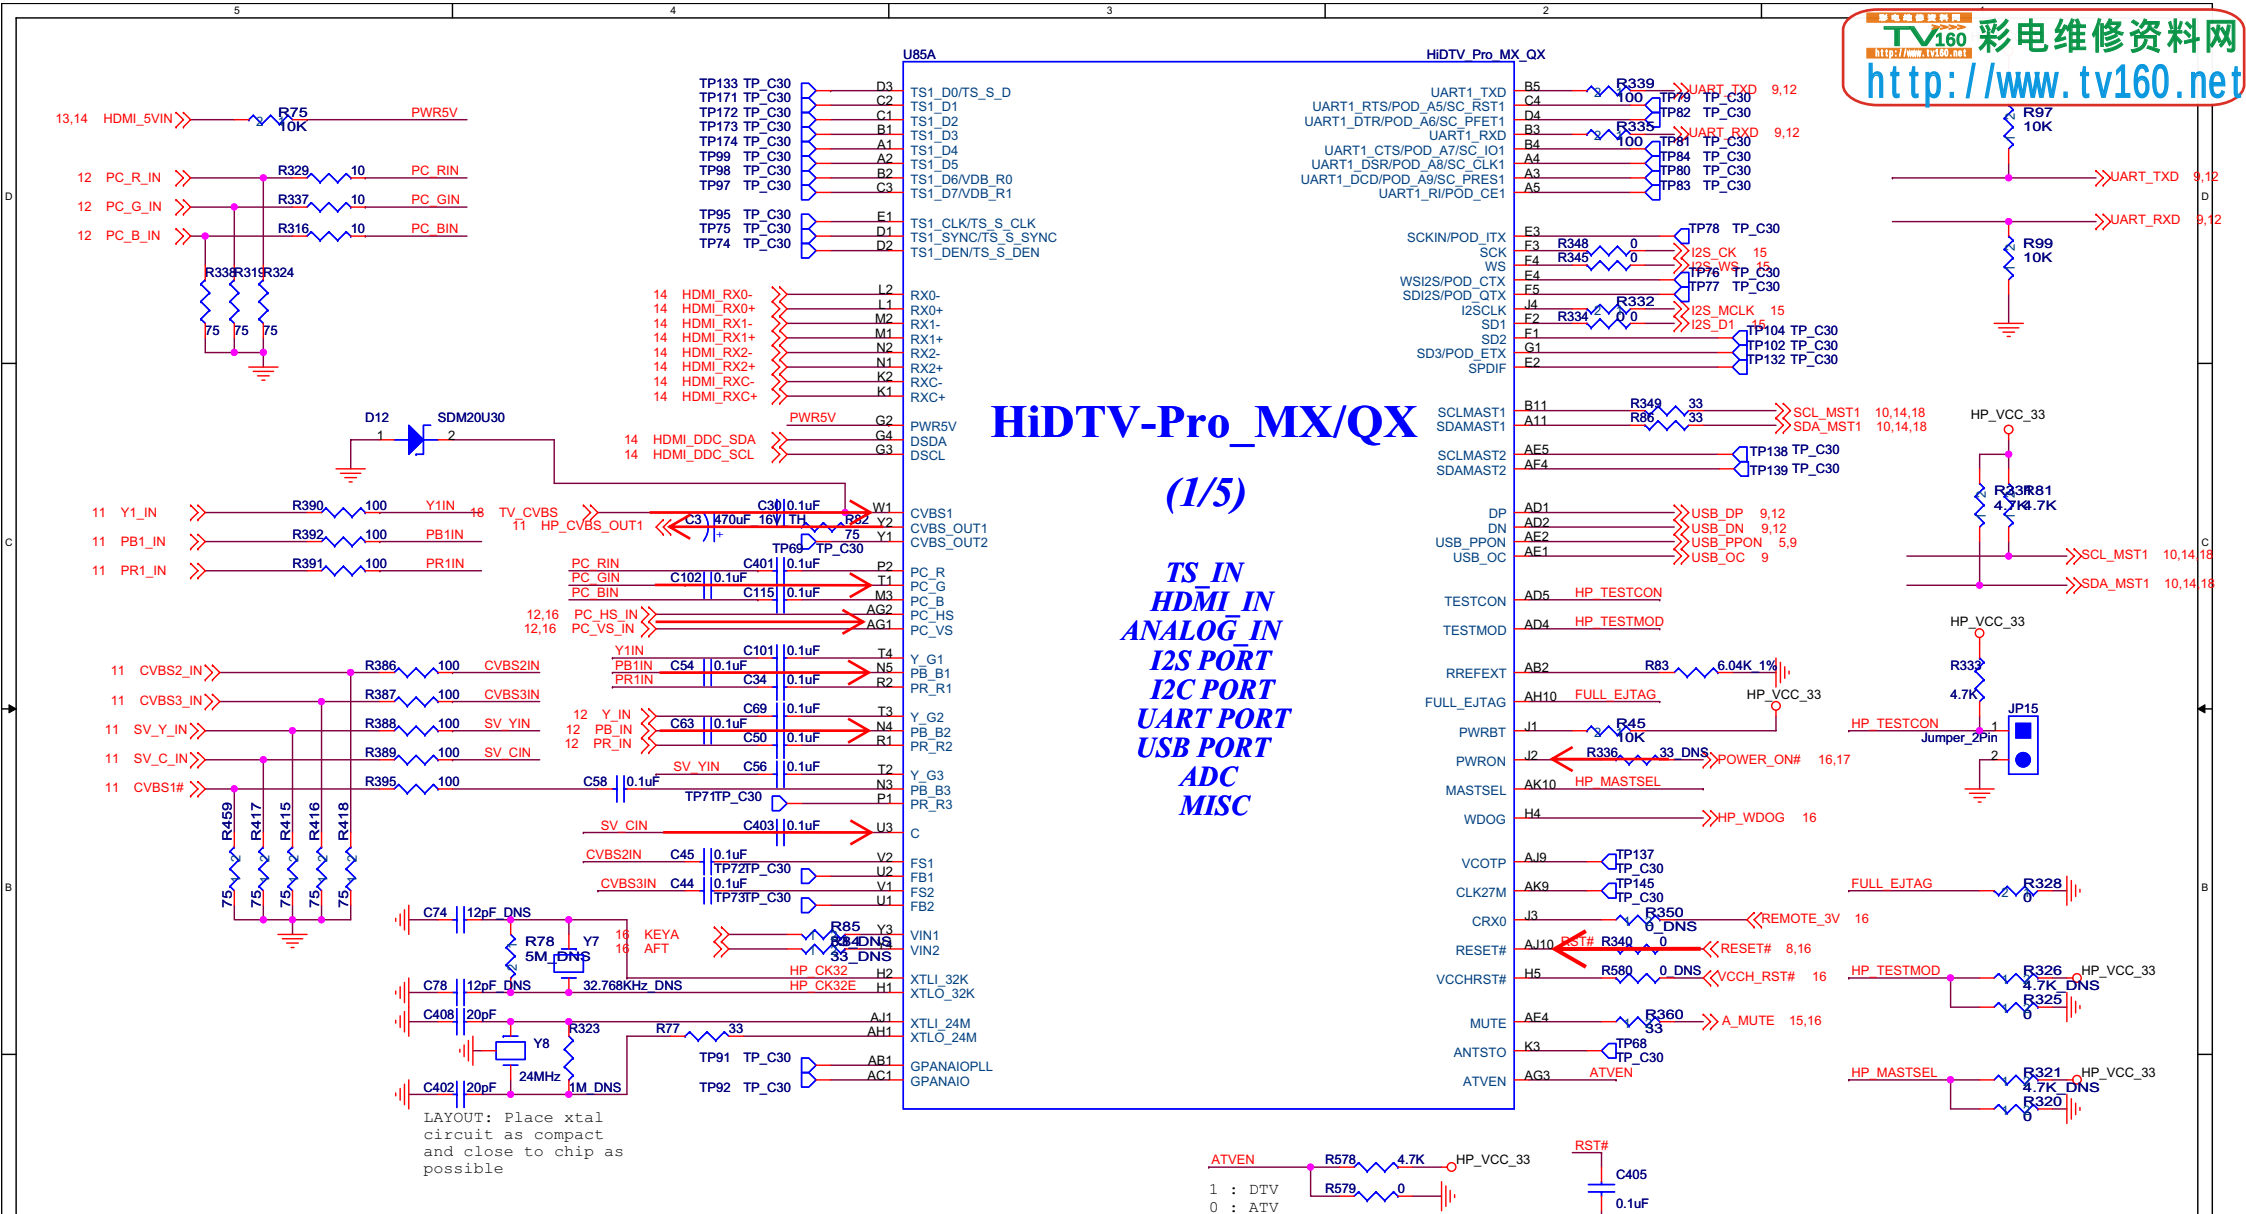

Pin Name	Pin No.	DEFINITION IN LCD880	DEFINITION IN EURO BOARD
CVBS1	W1	MAIN TUNER INPUT	MAIN TUNER INPUT
Y_G3	T2	MAIN CHANNEL CVBS RCA CONNECTOR INPUT	MAIN CHANNEL CVBS RCA CONNECTOR INPUT
PB_B3	N3	TEST POINT	SCART1 CVBS INPUT
PR_R3	P1	TEST POINT	SCART2 CVBS INPUT
FB1	U2	TEST POINT	SCART1 FB INPUT
FB2 ⁵	U1	TEST POINT ⁴	SCART2 or 3 Chroma INPUT ³
FS1	V2	CVBS2 INPUT	SCART1 FS INPUT
FS2	V1	CVBS3 INPUT	SCART2 FS INPUT
Y_G2	T3	Y2 INPUT	SCART1 G INPUT
PB_B2	N4	PB2 INPUT	SCART1 B INPUT
PR_R2	R1	PR2 INPUT	SCART1 R INPUT



shiyao town baocun district shenzhen skyworth china			
the third institute Tangliangnan 075526859374			
SIZE B	TRIDENT SVP QX	8DA5	VERSION A
wednesday	August 27, 2008	Sheet	1 of 19


HP_DQS[0..7] 6,7
HP_DQS#0[0..7] 6,7
HP_DQM[0..7] 6,7
HP_MA[0..12] 6,7
HP_BA[0..1] 6,7
HP_CAS# 6,7
HP_RAS# 6,7
HP_WE# 6,7
HP_CKE 6,7
HP_ODT 6,7
HP_CS0# 6,7
HP_MCLK0 6
HP_MCLK0# 6
HP_MCLK1 7
HP_MCLK1# 7

HiDTV-Pro_MX/QX (2/5) DDR2 INTERFACE

To DDR2
读写控制

To DDR2
地址线


To DDR2
数据线

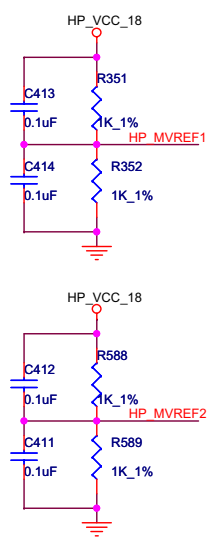


HP_DQS	AH28	DQS0
HP_DQS#	AG28	DQS0#
HP_DQS1	AA29	DQS1
HP_DQS#1	AA30	DQS1#
HP_DQS2	J29	DQS2
HP_DQS#2	J30	DQS2#
HP_DQS3	D28	DQS3
HP_DQS#3	C28	DQS3#
HP_DQS4	AG29	DQS4
HP_DQS#4	AG30	DQS4#
HP_DQS5	AB28	DQS5
HP_DQS#5	AA28	DQS5#
HP_DQS6	K28	DQS6
HP_DQS#6	J28	DQS6#
HP_DQS7	C29	DQS7
HP_DQS#7	C30	DQS7#
HP_DQM0	AH29	DQM0
HP_DQM1	AB30	DQM1
HP_DQM2	K30	DQM2
HP_DQM3	D29	DQM3
HP_DQM4	AH30	DQM4
HP_DQM5	AB29	DQM5
HP_DQM6	K29	DQM6
HP_DQM7	D30	DQM7
HP_MA	R28	MAA0
HP_MA1	V29	MAA1
HP_MA2	R29	MAA2
HP_MA3	V27	MAA3
HP_MA4	P28	MAA4
HP_MA5	U26	MAA5
HP_MA6	R30	MAA6
HP_MA7	V30	MAA7
HP_MA8	N29	MAA8
HP_MA9	T29	MAA9
HP_MA10	V28	MAA10
HP_MA11	N28	MAA11
HP_MA12	N30	MAA12/CS1
HP_BA0	U27	BA0
HP_BA1	U28	BA1
HP_MCLK0	AE30	CLK1
HP_MCLK0#	AD30	CLK1#
HP_MCLK1	G30	CLK2
HP_MCLK1#	F30	CLK2#
HP_MVREF1	AK26	MVREF1
HP_MVREF2	A26	MVREF2
HP_CAS#	T28	CAS
HP_RAS#	P30	RAS
HP_WE#	W28	WE
HP_CS0#	U29	CS0
HP_CKE	V26	CKE
HP_ODT	P29	ODT




U88B	HIDTV Pro MX_QX	
DQS0	MD0	AJ26 HP MD0
DQS0#	MD1	AJ27 HP MD1
DQS1	MD2	AH26 HP MD2
DQS1#	MD3	AH27 HP MD3
DQS2	MD4	AE26 HP MD4
DQS2#	MD5	AE27 HP MD5
DQS3	MD6	AE25 HP MD6
DQS3#	MD7	AE26 HP MD7
DQS4	MD8	AD28 HP MD8
DQS4#	MD9	AD29 HP MD9
DQS5	MD10	AC29 HP MD10
DQS5#	MD11	AC30 HP MD11
DQS6	MD12	Y29 HP MD12
DQS6#	MD13	Y30 HP MD13
DQS7	MD14	W29 HP MD14
DQS7#	MD15	W30 HP MD15
	MD16	M29 HP MD16
DQM0	MD17	M30 HP MD17
DQM1	MD18	L29 HP MD18
DQM2	MD19	L30 HP MD19
DQM3	MD20	H29 HP MD20
DQM4	MD21	H30 HP MD21
DQM5	MD22	G28 HP MD22
DQM6	MD23	G29 HP MD23
DQM7	MD24	E26 HP MD24
	MD25	E26 HP MD25
MAA0	MD26	E27 HP MD26
MAA1	MD27	D26 HP MD27
MAA2	MD28	C27 HP MD28
MAA3	MD29	C26 HP MD29
MAA4	MD30	B27 HP MD30
MAA5	MD31	B27 HP MD31
MAA6	MD32	AK28 HP MD32
MAA7	MD33	AK29 HP MD33
MAA8	MD34	AJ29 HP MD34
MAA9	MD35	AJ30 HP MD35
MAA10	MD36	AE29 HP MD36
MAA11	MD37	AE30 HP MD37
MAA12/CS1	MD38	AE28 HP MD38
	MD39	AE29 HP MD39
BA0	MD40	AD25 HP MD40
BA1	MD41	AD26 HP MD41
	MD42	AC26 HP MD42
CLK1	MD43	AC27 HP MD43
CLK1#	MD44	Y26 HP MD44
	MD45	Y27 HP MD45
CLK2	MD46	W25 HP MD46
CLK2#	MD47	W26 HP MD47
	MD48	M25 HP MD48
MVREF1	MD49	M26 HP MD49
MVREF2	MD50	L26 HP MD50
	MD51	L27 HP MD51
CAS	MD52	H27 HP MD52
RAS	MD53	H26 HP MD53
WE	MD54	G25 HP MD54
CS0	MD55	G26 HP MD55
CKE	MD56	F28 HP MD56
ODT	MD57	F29 HP MD57
	MD58	E29 HP MD58
	MD59	E30 HP MD59
	MD60	B29 HP MD60
MCLK0	MD61	B30 HP MD61
MCLK0#	MD62	A28 HP MD62
	MD63	A29 HP MD63



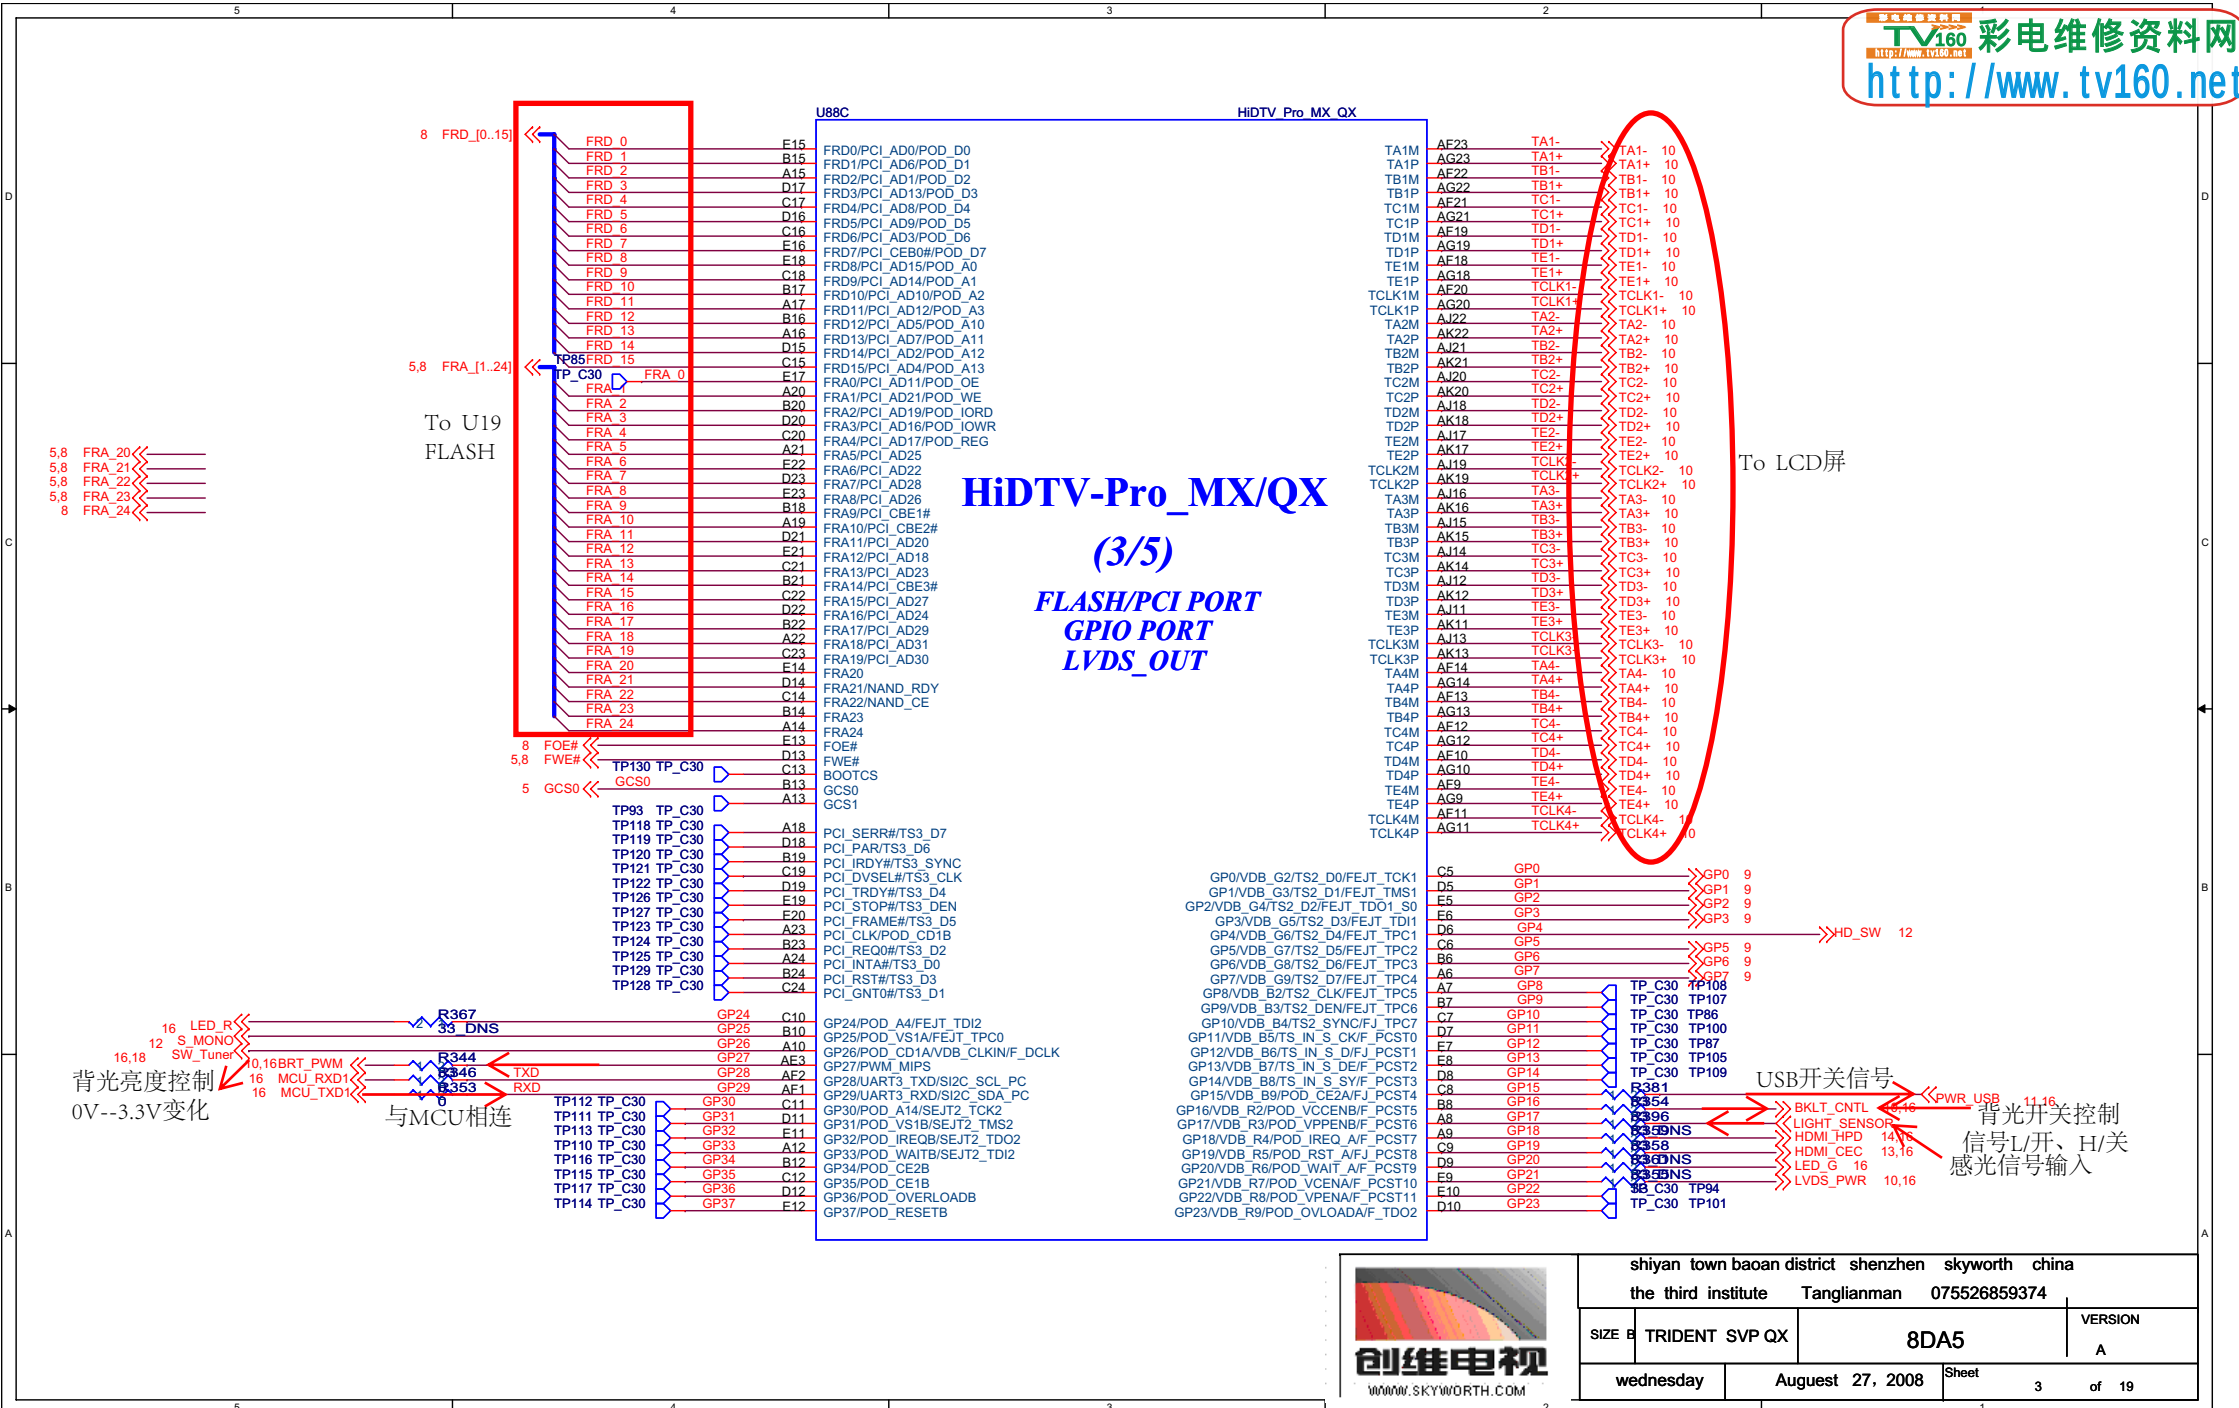

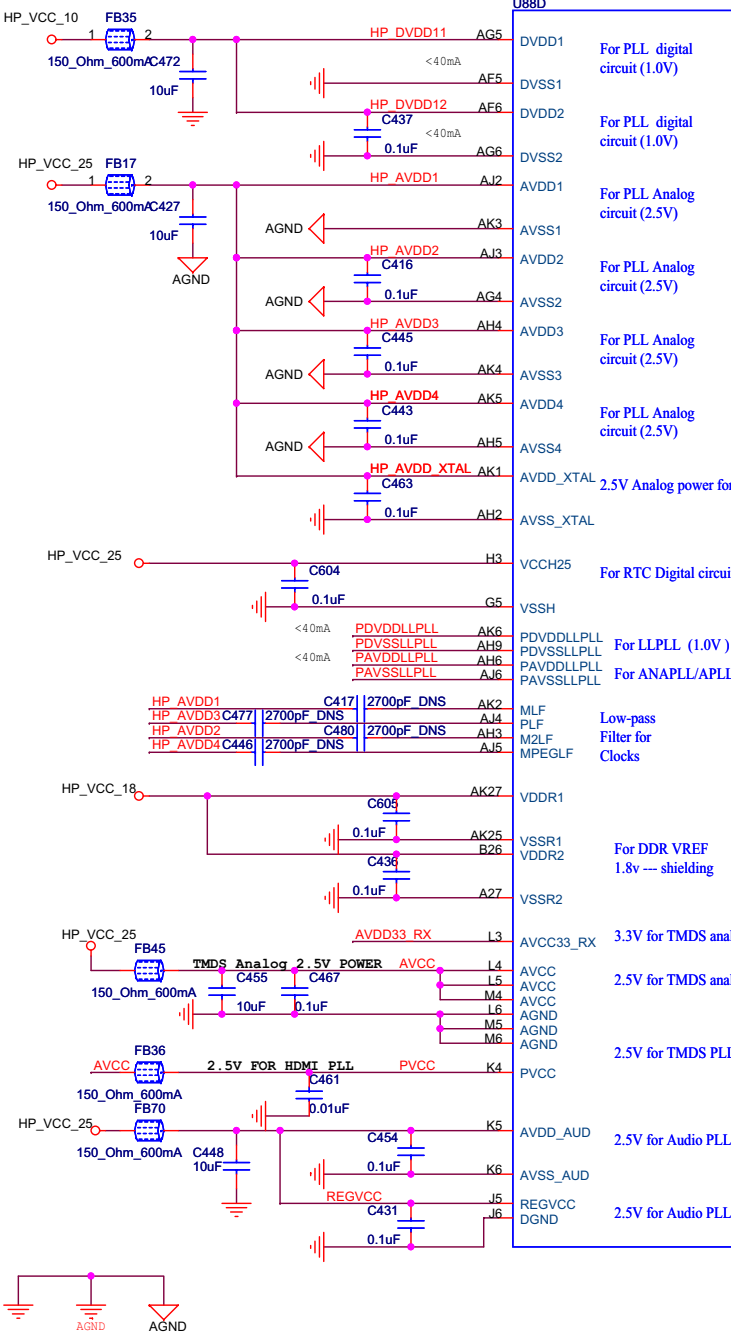


HiDTV-Pro_MX/QX (4/5) MISC_POWER


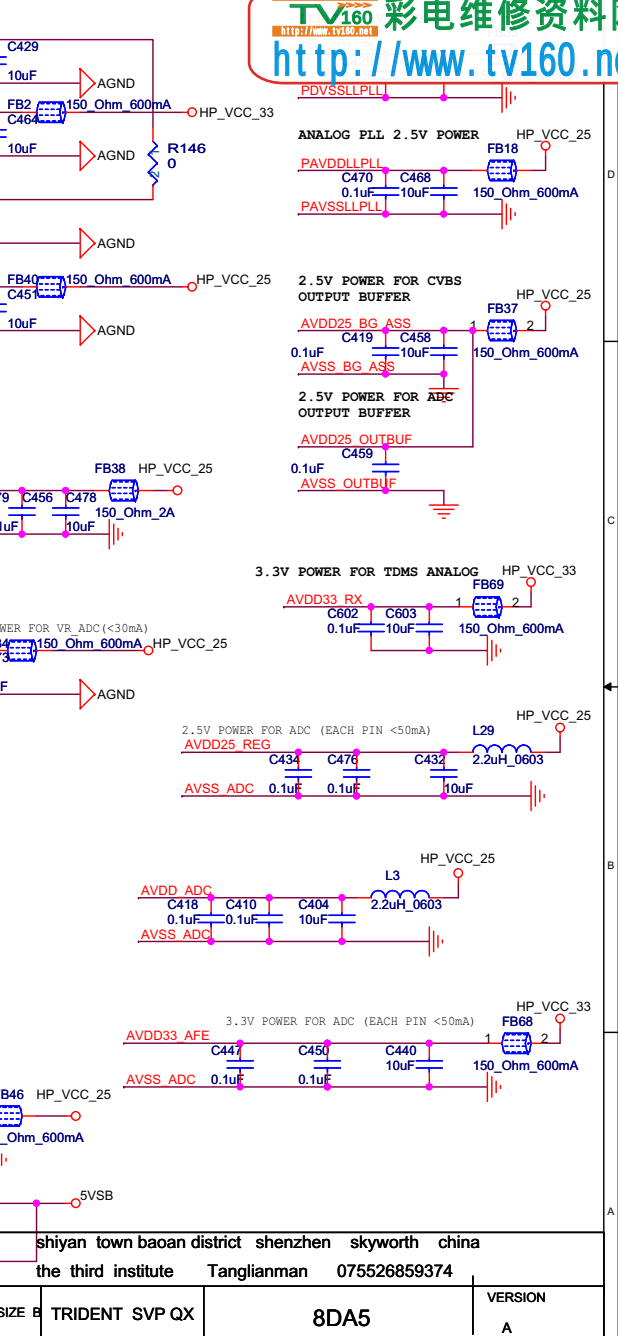
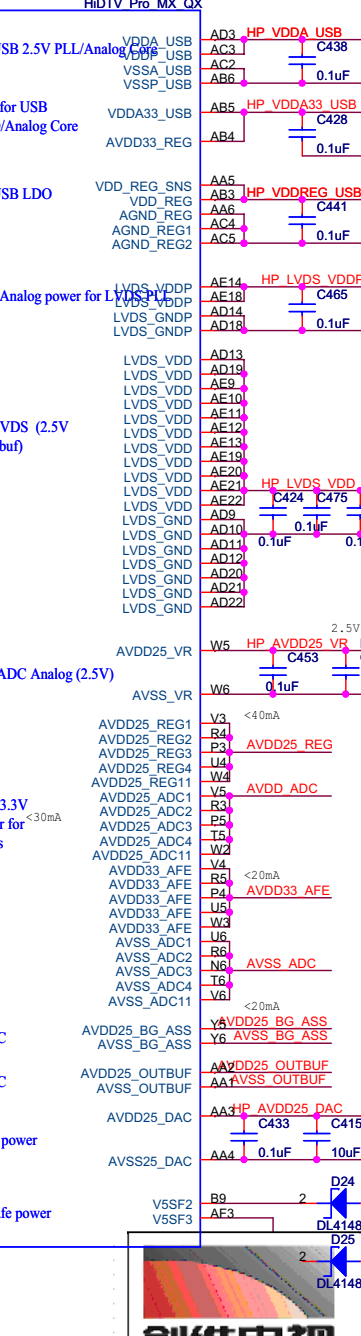


shiyao town baoan district shenzhen skyworth china			
the third institute Tanglianman 075526859374			
SIZE B	TRIDENT SVP QX	8DA5	VERSION A
wednesday	August 27, 2008	Sheet 4	of 19




HiDTV-Pro_MX/QX (5/5) MAIN POWER / GROUND

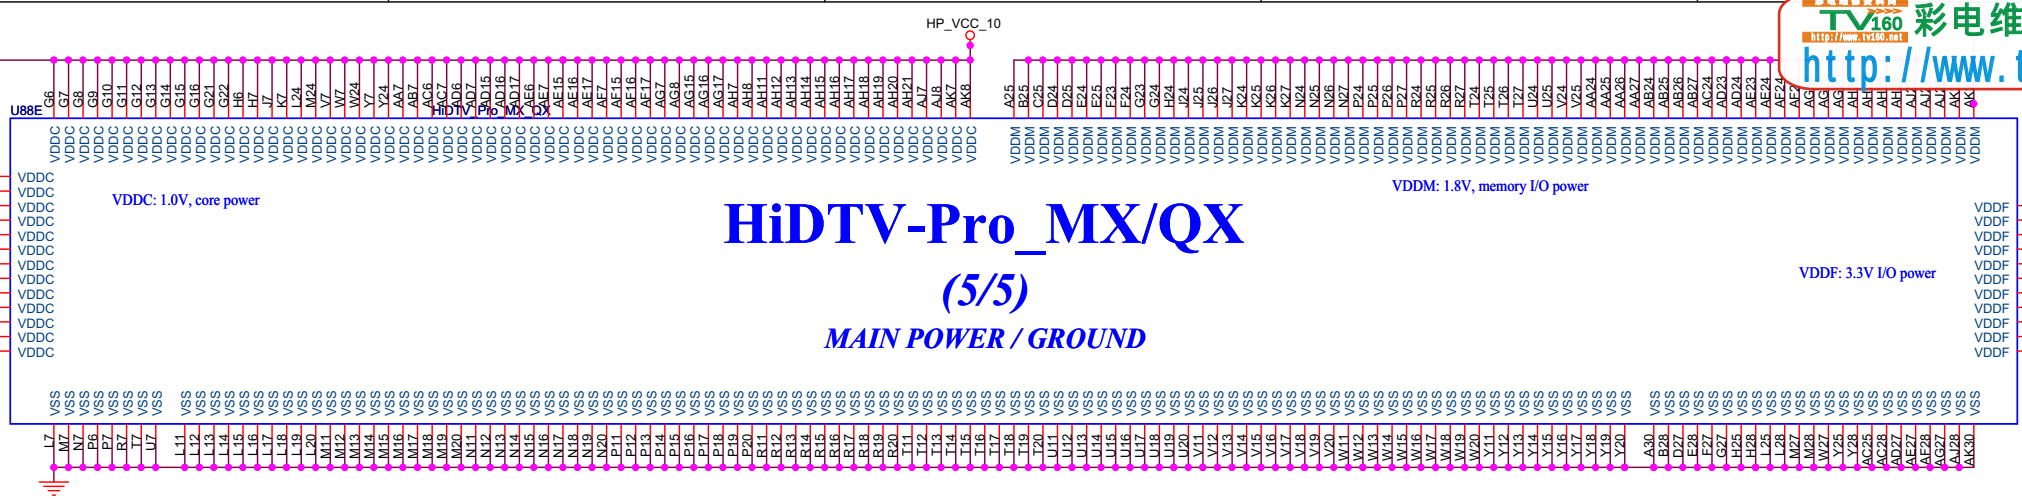


No	PIN	Configure Pin	Description & Setting
1	USB_PPON	ROMSIZE	boot rom width, 0 : 8bit 1 : 16bit
2	GCS0	EMA_CONFIG	Default: 0
3	FWE	FLASH_EPCI_EN	0: PCI 1: FLASH, default connect to 0
4	FRA20	CONM_SN	0: slaver 1: master, default connect to 1
5	FRA21	ENDIAN_SEL[0]	
6	FRA22	ENDIAN_SEL[1]	Default: 2'b00
7	FRA23	I2C_M8051_SEL	1: To enable 8051 master/slaver 0: Disable 8051 master/slaver

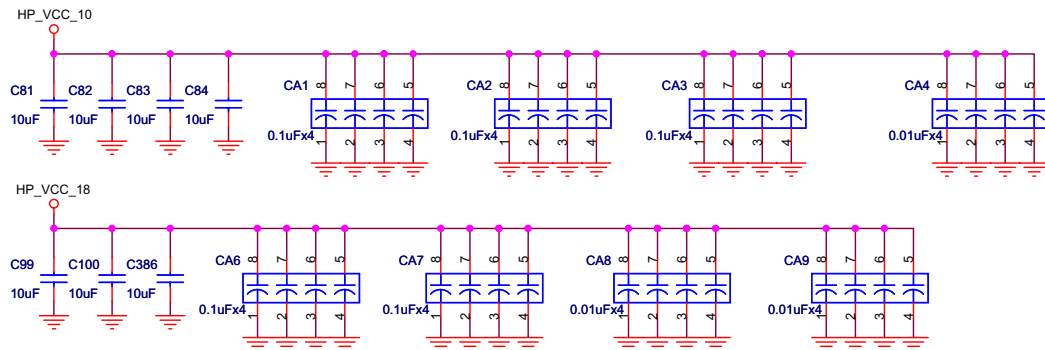
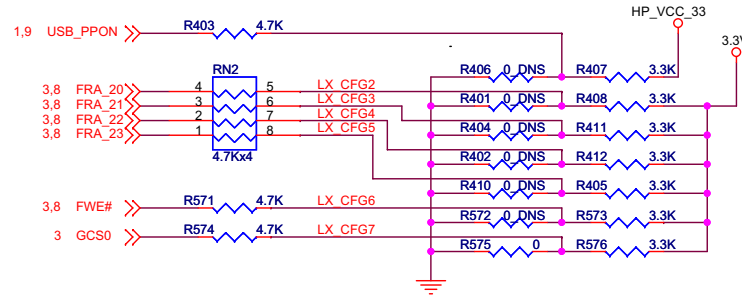


shiyao town baoan district shenzhen skyworth china			
the third institute Tanglianman 075526859374			
SIZE B	TRIDENT SVP QX	8DA5	VERSION A
wednesday	August 27, 2008	Sheet 5	of 19

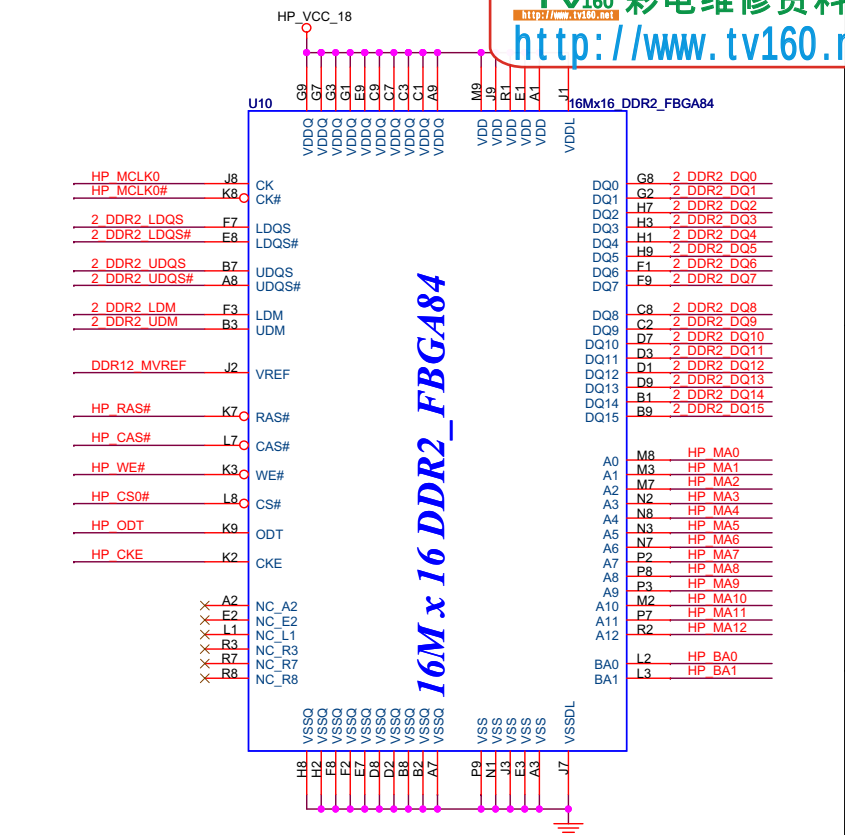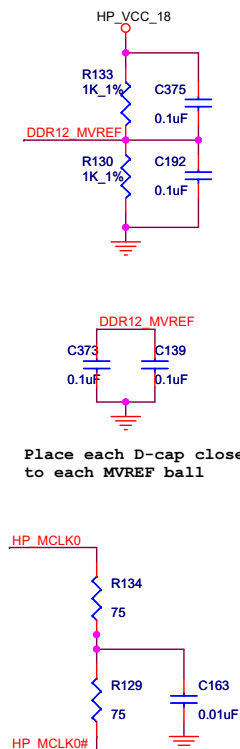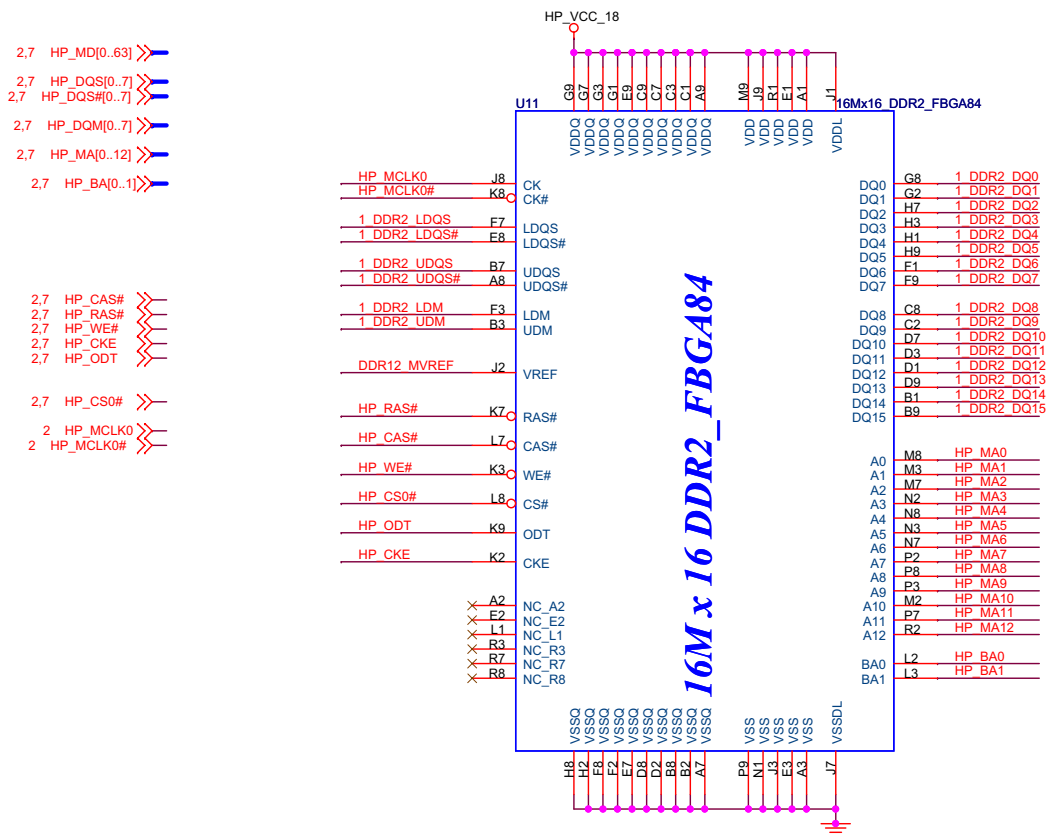[illegible]

shiyuan town baoan district shenzhen skyworth china			
the third institute Tanglianman 075526859374			
SIZE B	TRIDENT SVP QX	8DA5	VERSION A
wednesday	August 27, 2008	Sheet	6 of 19





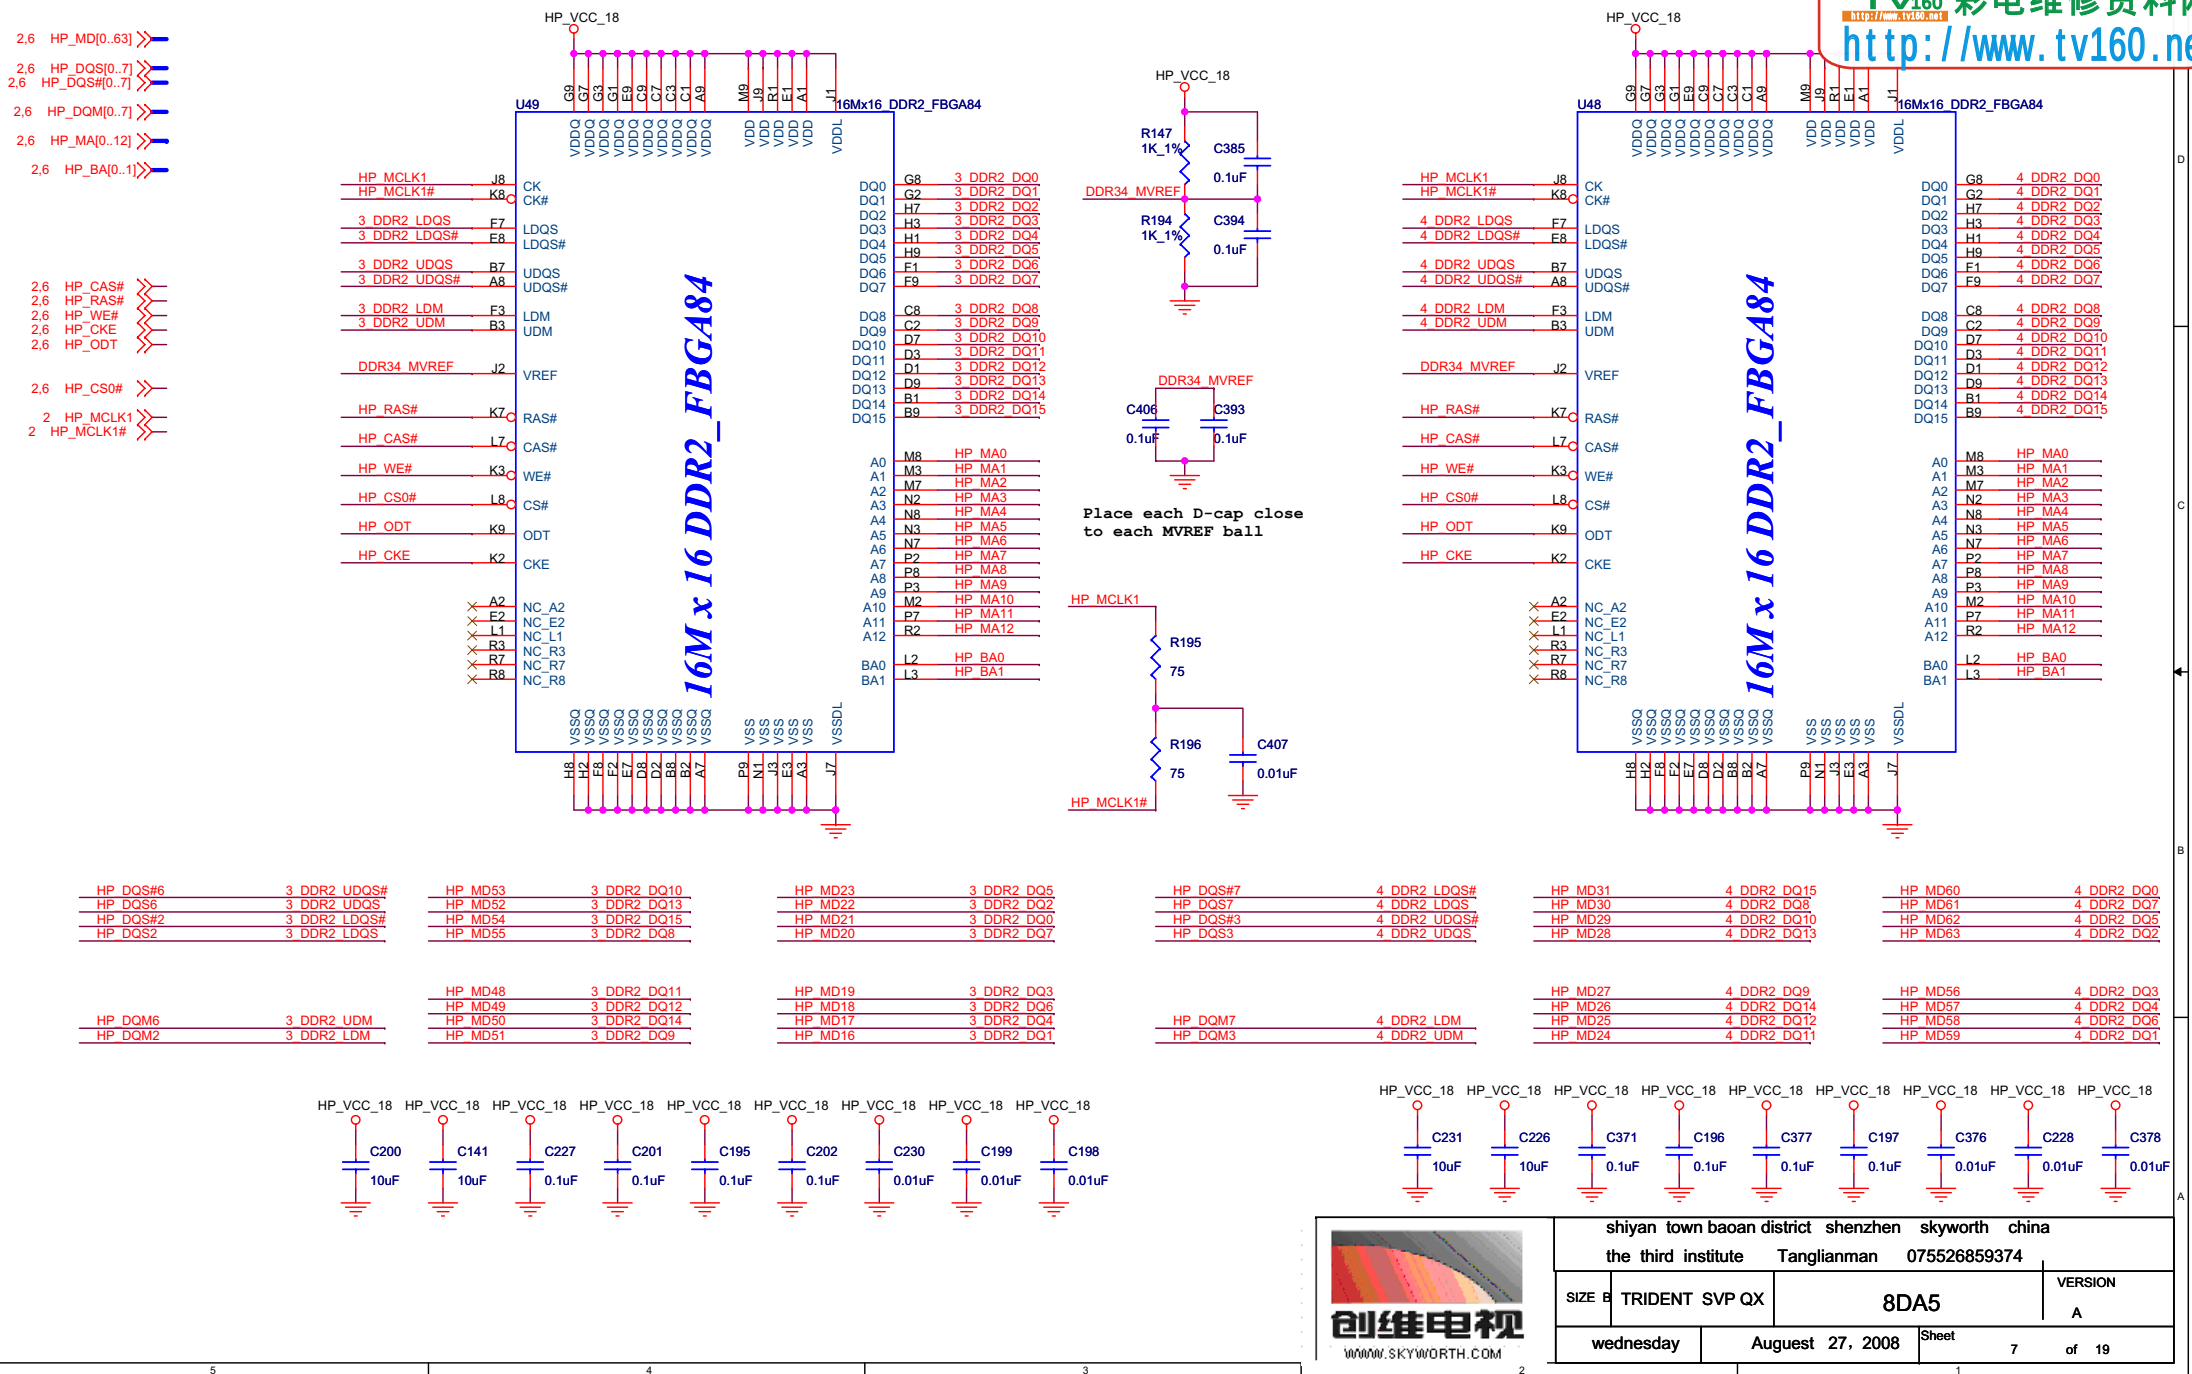


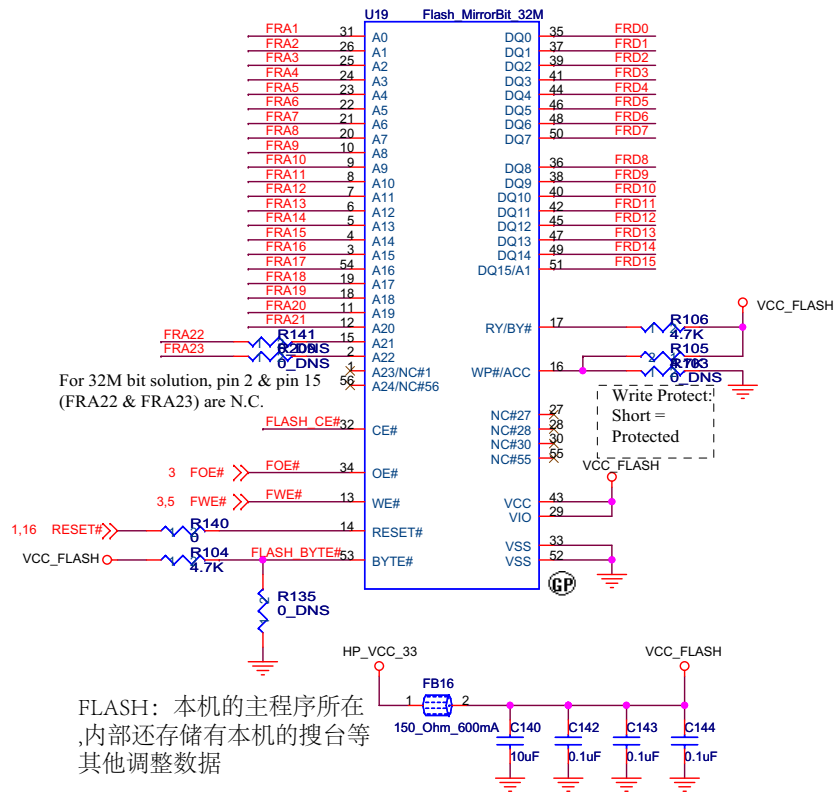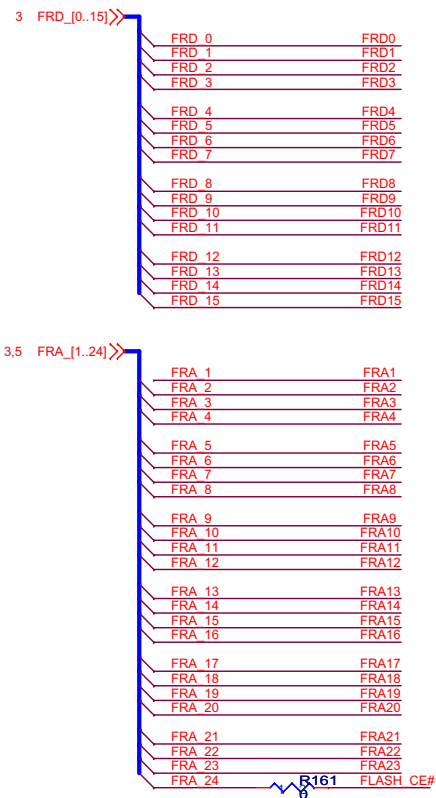


FLASH: 本机的主程序所在,内部还存储有本机的搜台等其他调整数据






shiyao town baoan district shenzhen skyworth china			
the third institute Tanglianman 075526859374			
SIZE B	TRIDENT SVP QX	8DA5	VERSION A
wednesday	August 27, 2008	Sheet 8	of 19







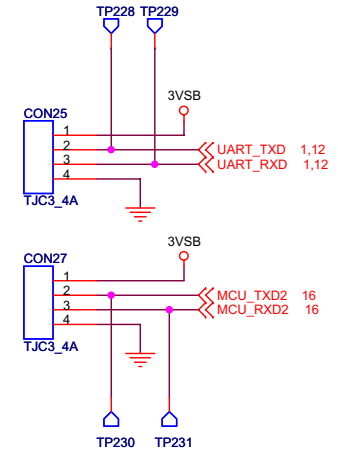
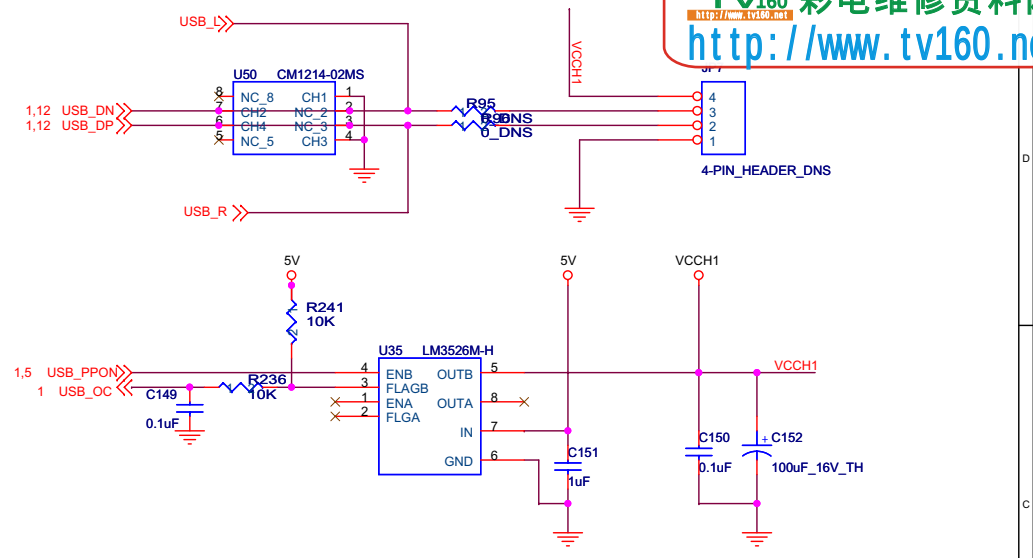
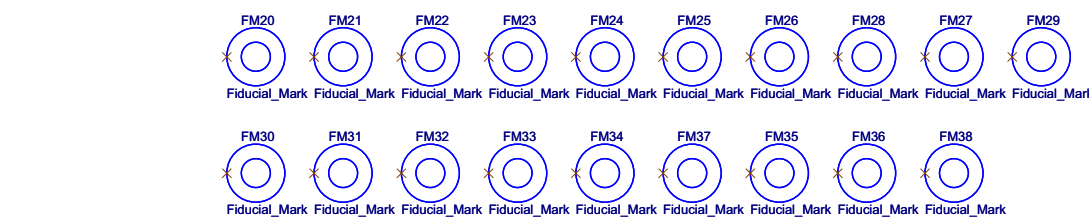
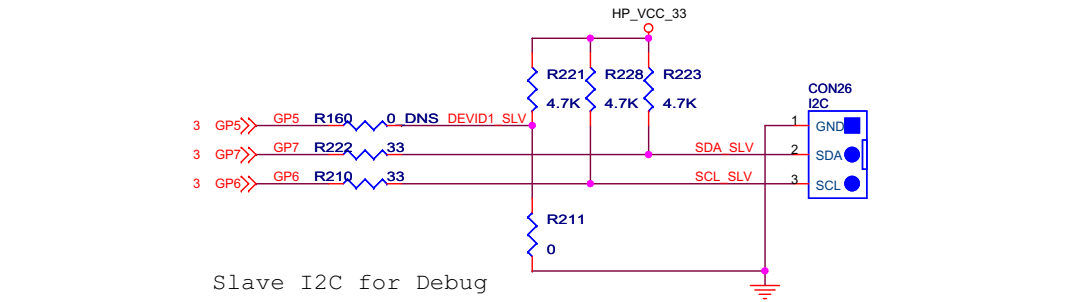
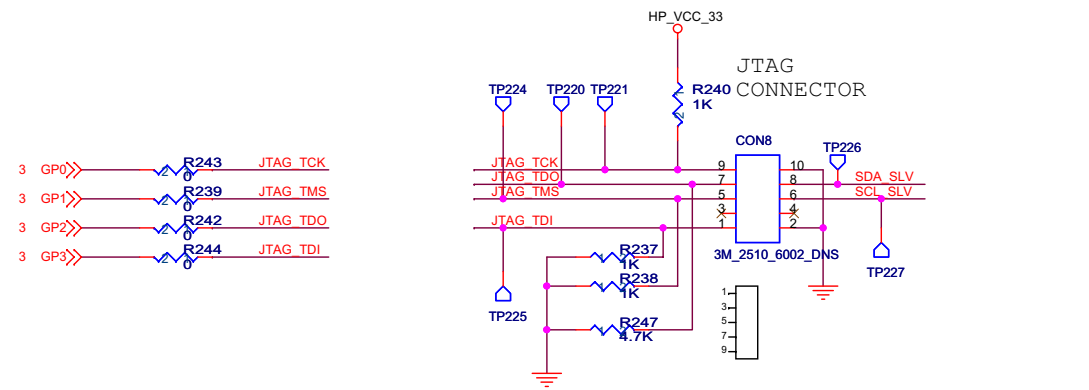


shiyao town baoan district shenzhen skyworth china			
the third institute Tanglianman 075526859374			
SIZE B	TRIDENT SVP QX	8DA5	VERSION A
wednesday	August 27, 2008	Sheet 9	of 19

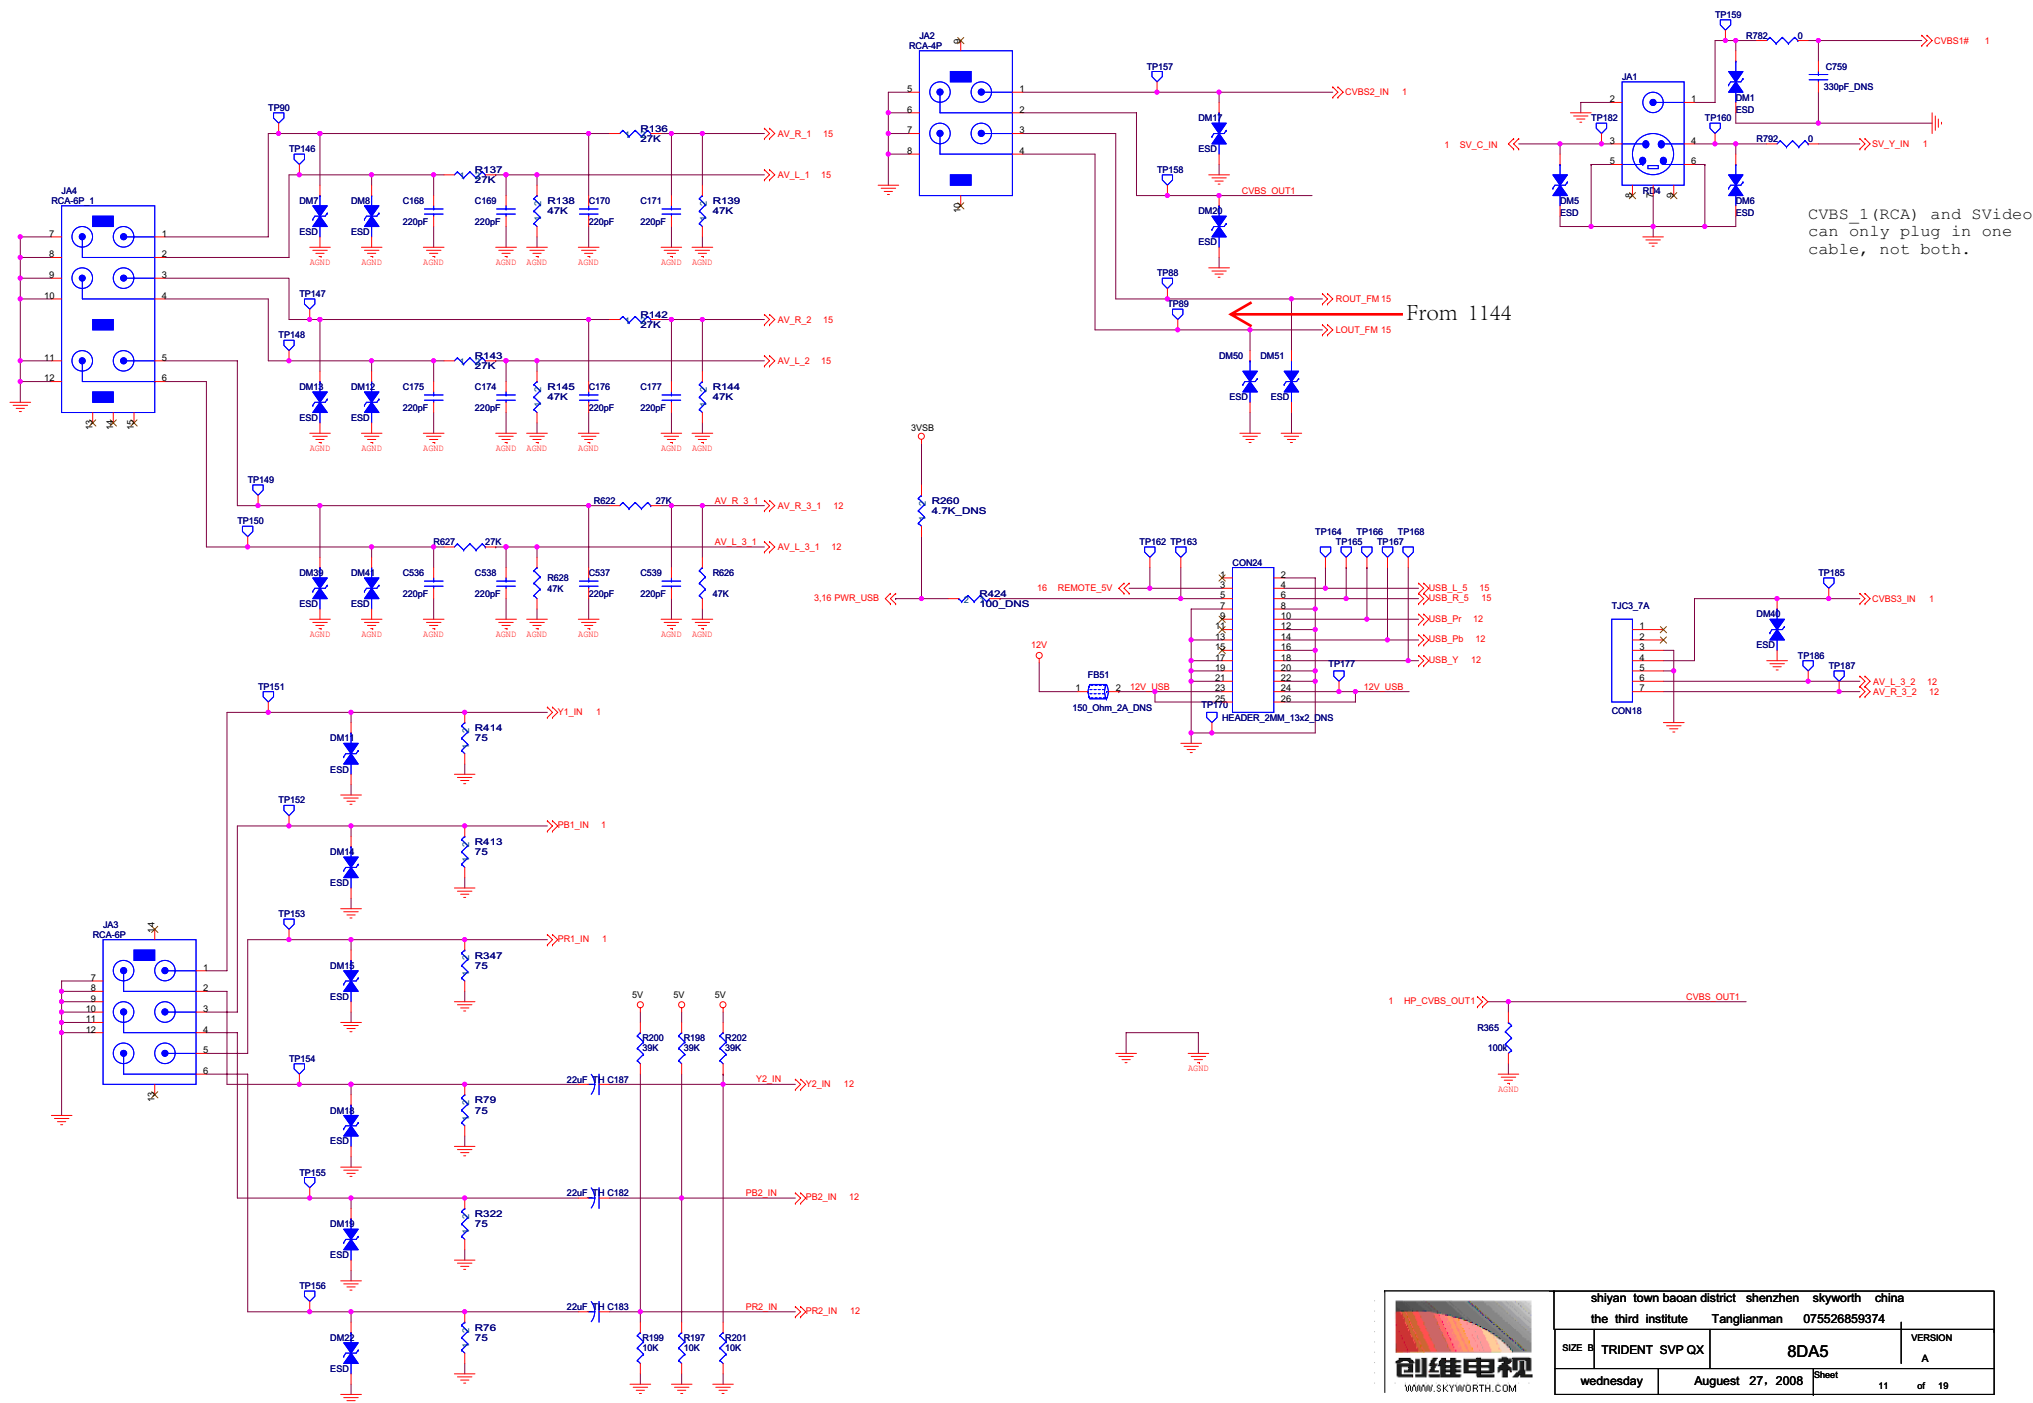

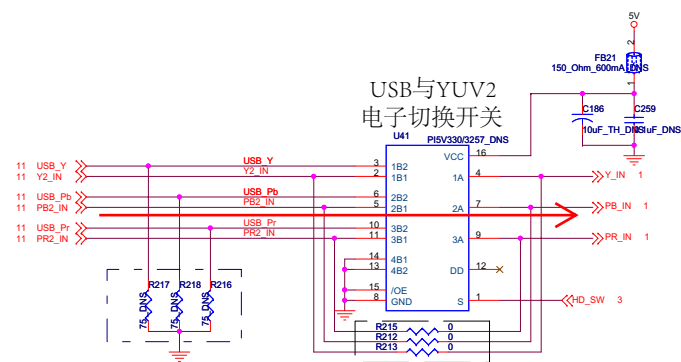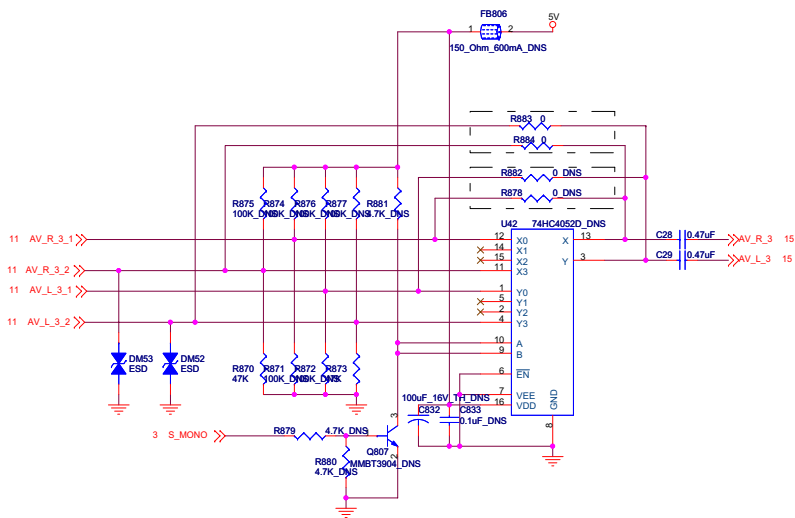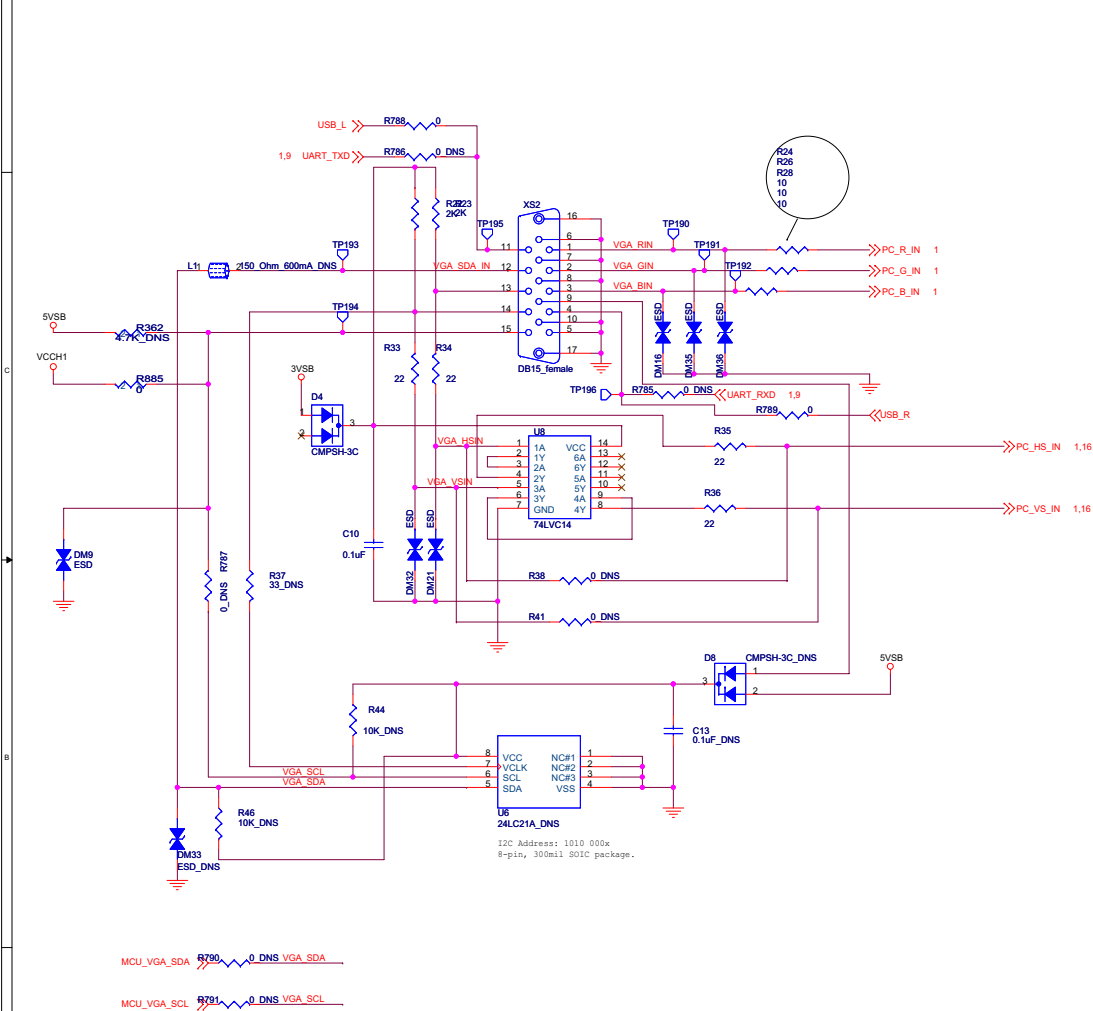

ESD保护器件

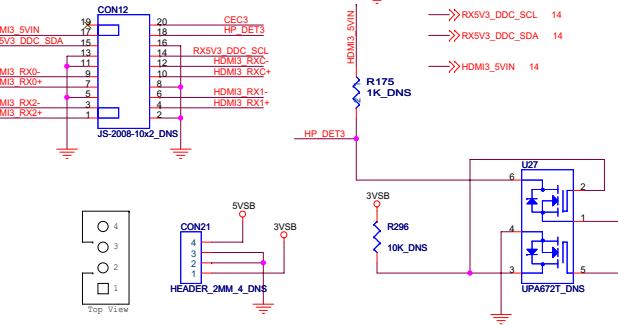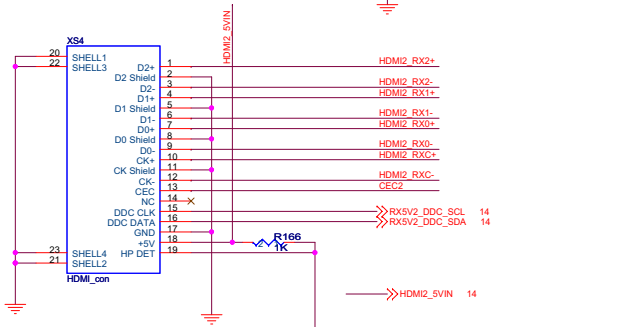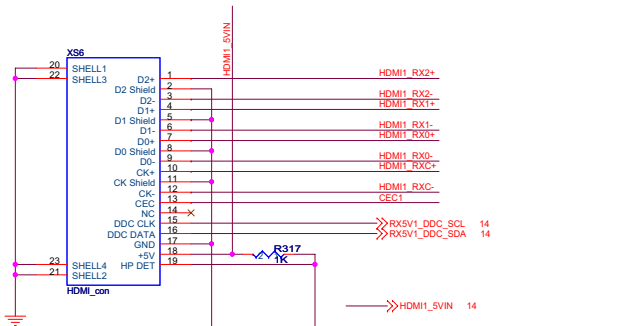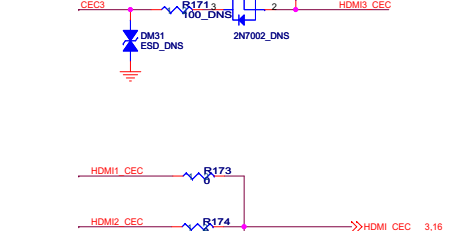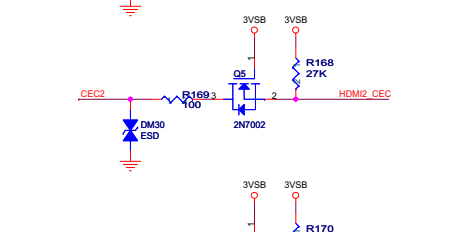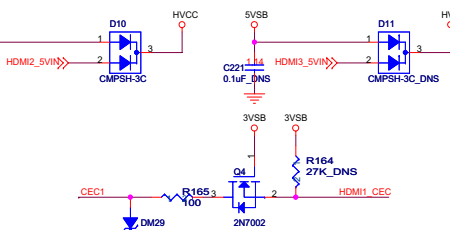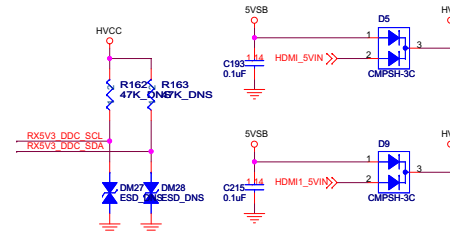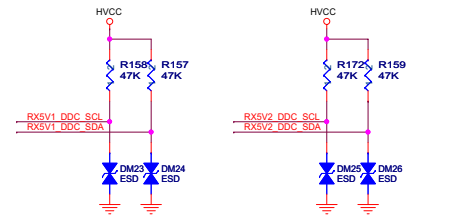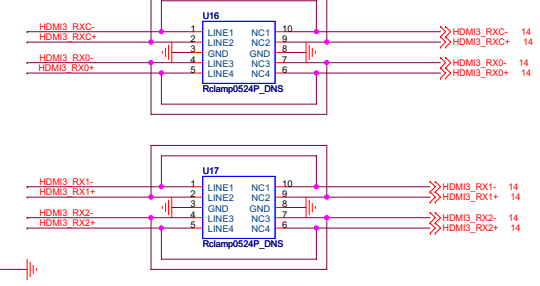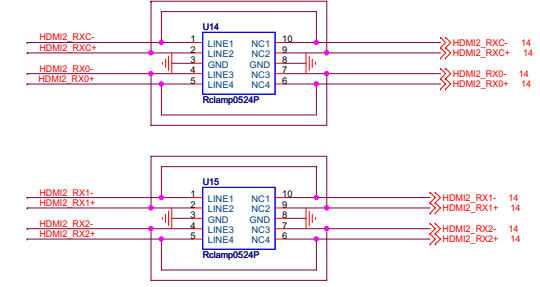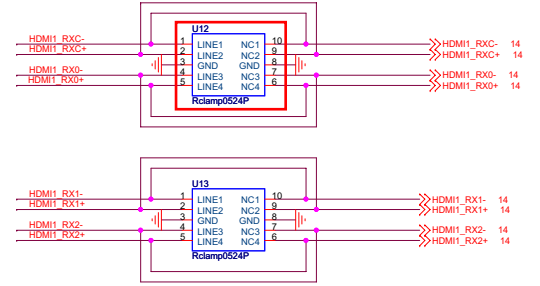




SIDE HDMI Connector

POWER CONNECTOR FOR HDMI REPEATER








shiyuan town baocan district shenzhen skyworth china			
the third institute Tangliangman 075526859374			
SIZE B	TRIDENT SVP QX	8DA5	VERSION A
wednesday	August 27, 2008	Sheet 13	of 19

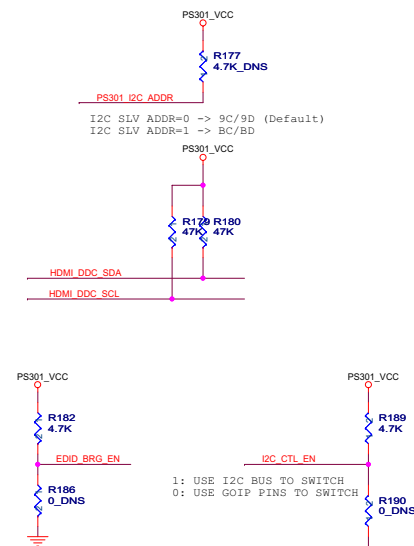


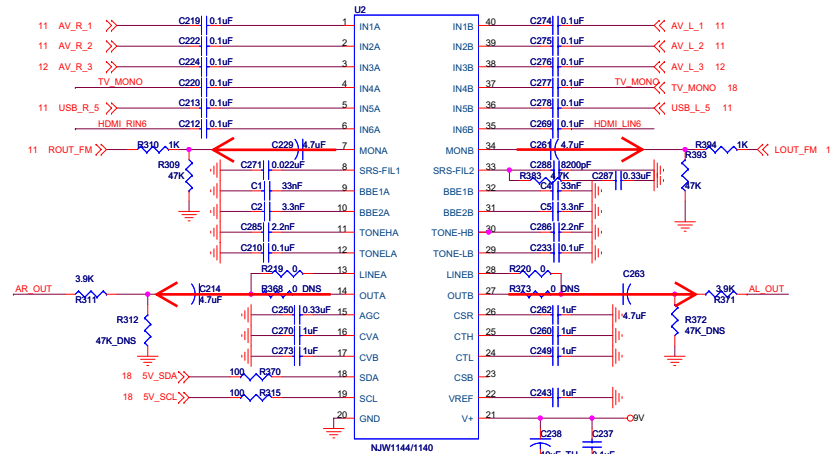
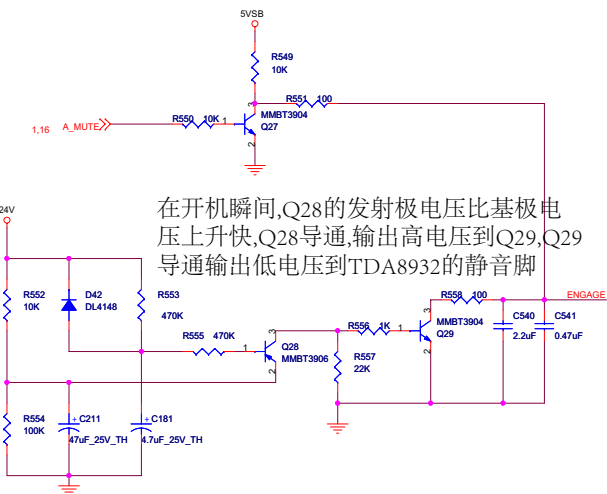


注：若U2是1140，则C1,C2,C4,C5 NC
若U2是1144，则C1,C2,C4,C5如图所示

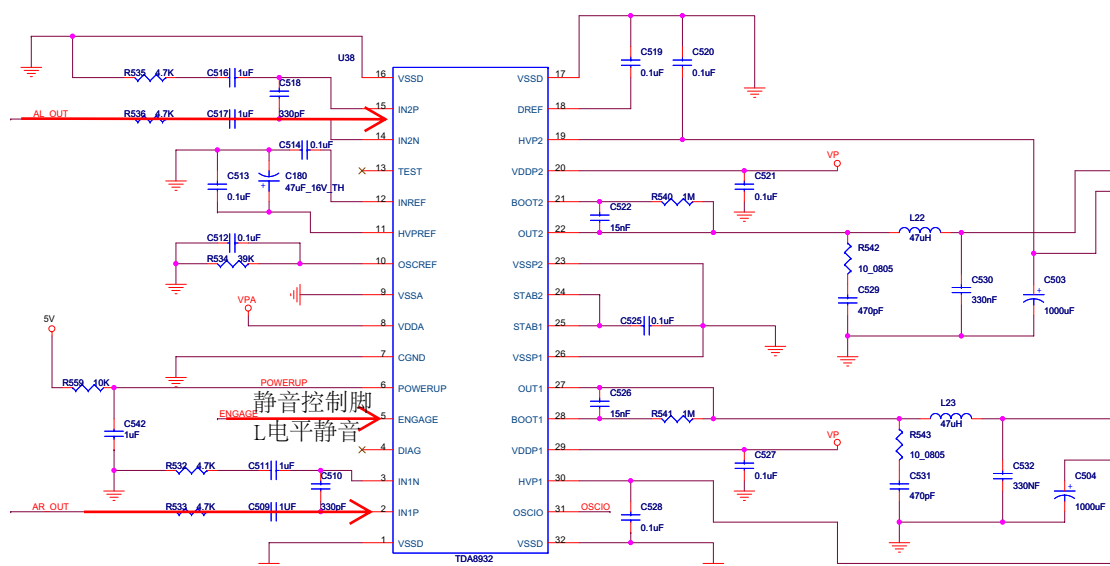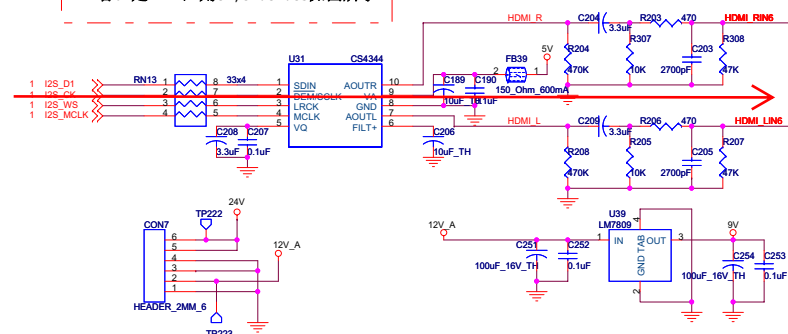


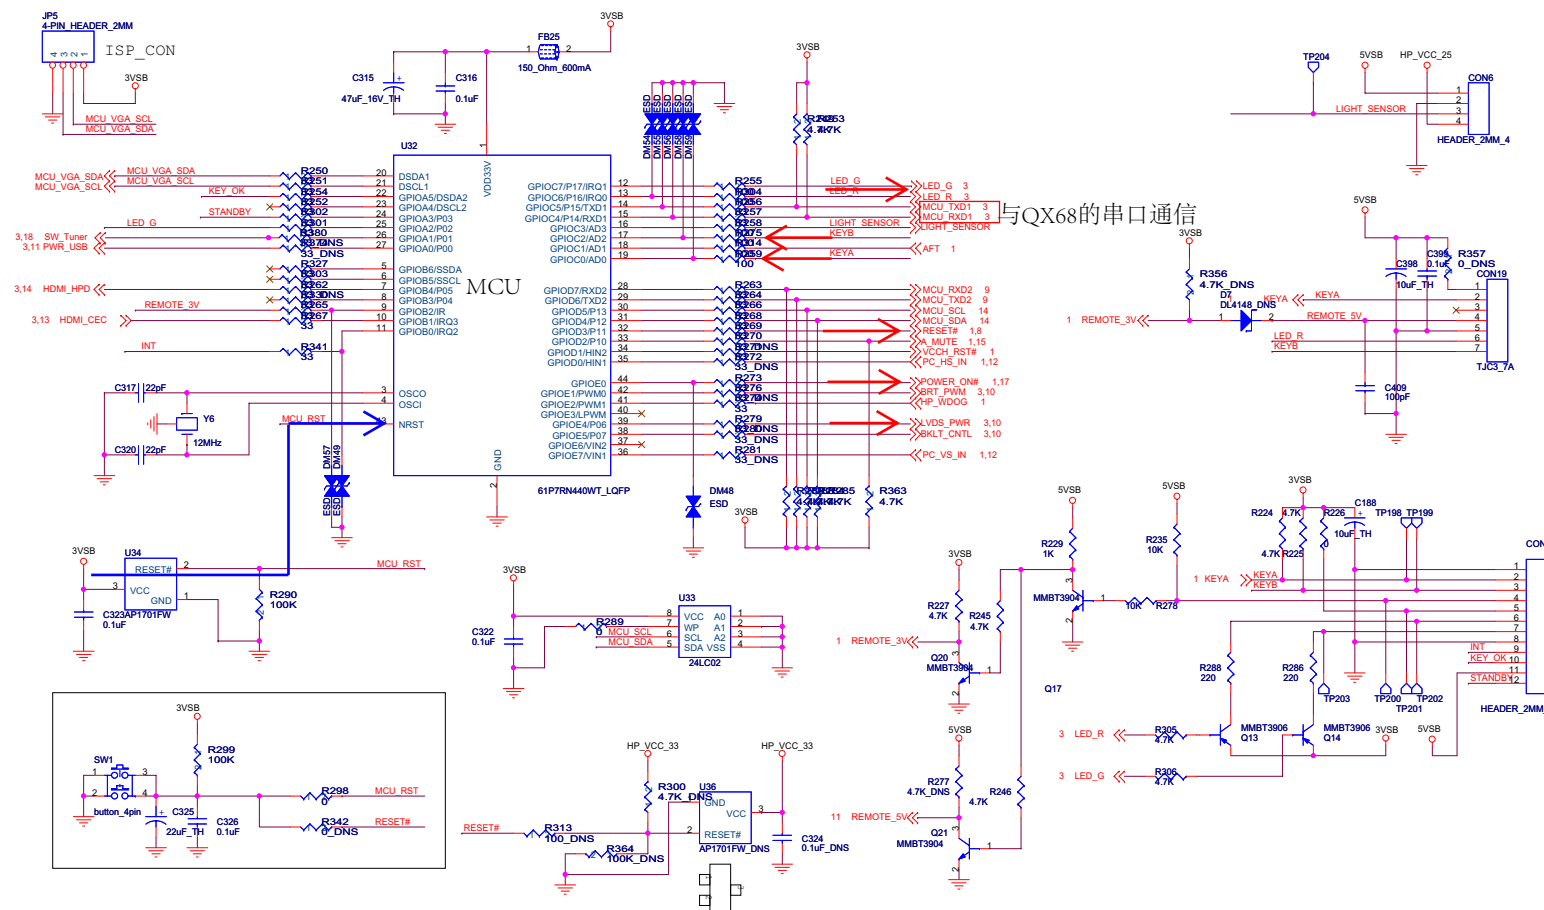

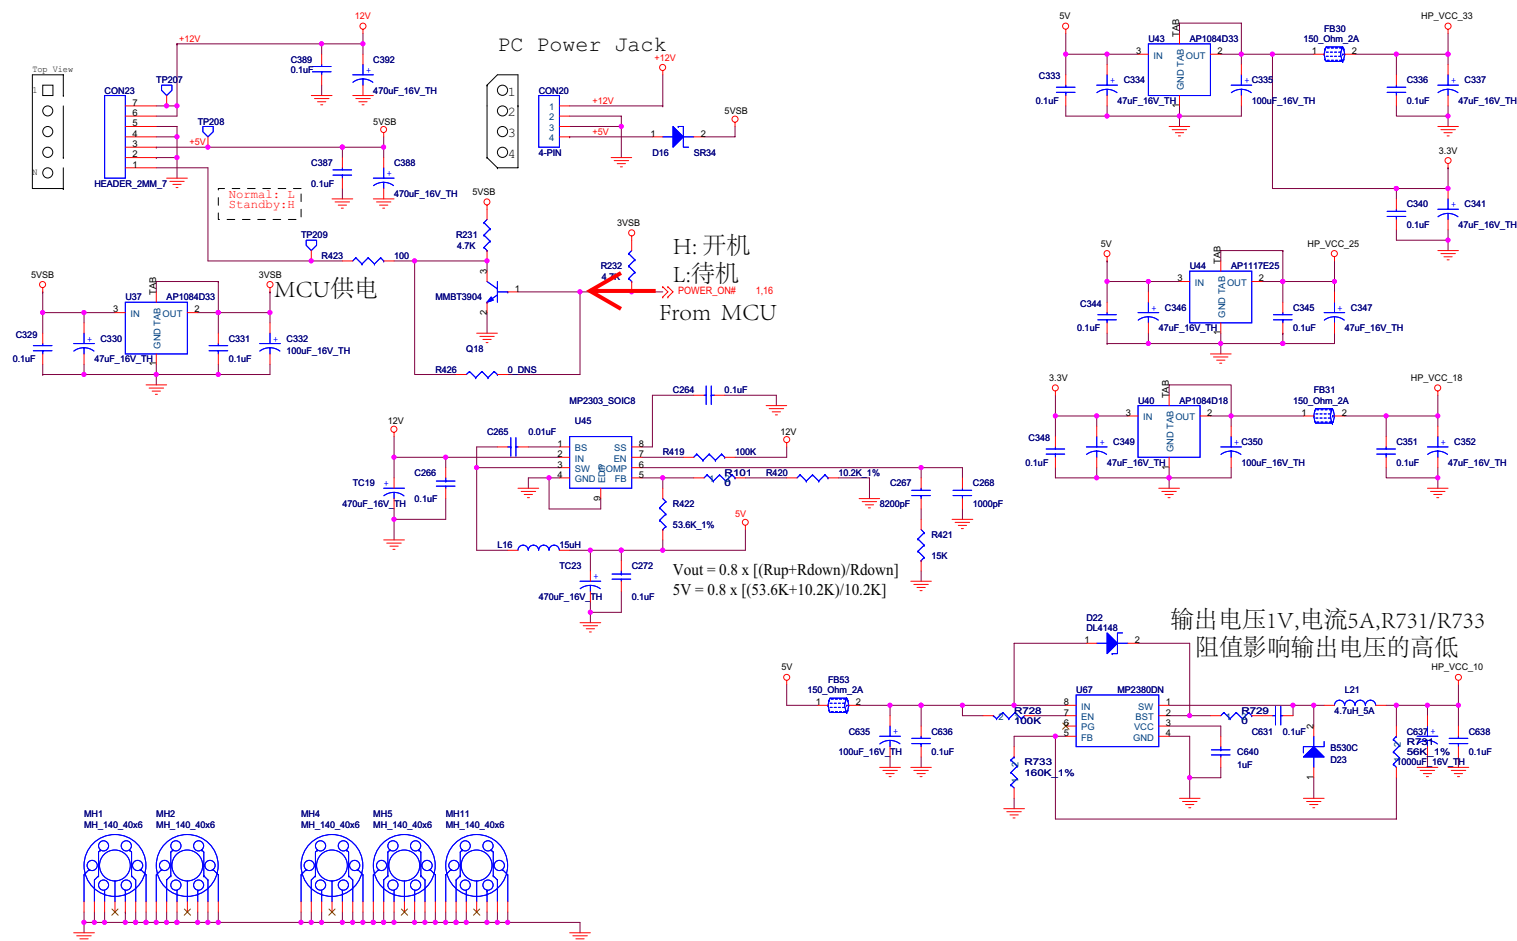

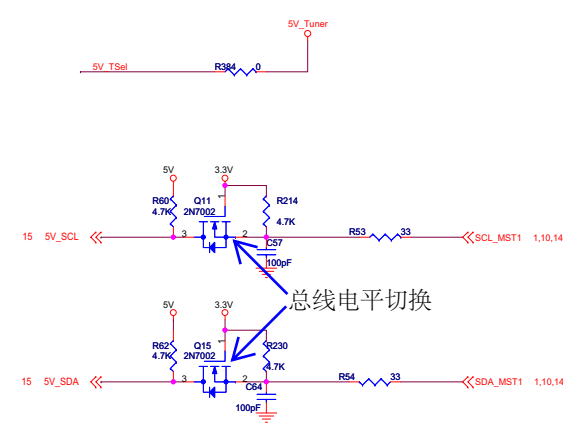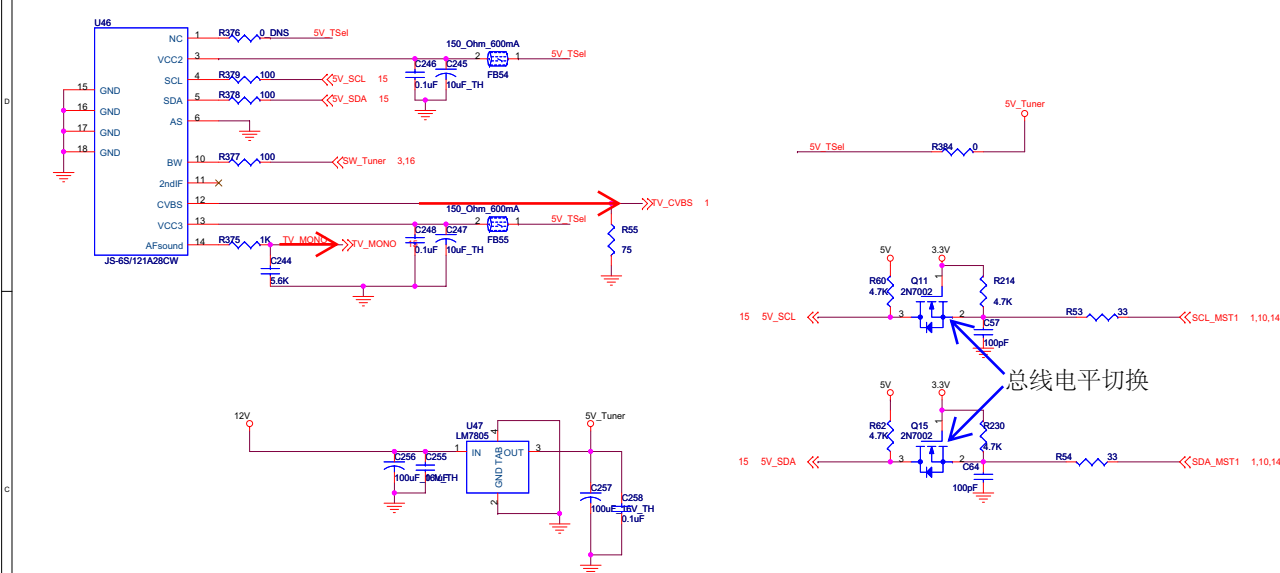

总线电平切换

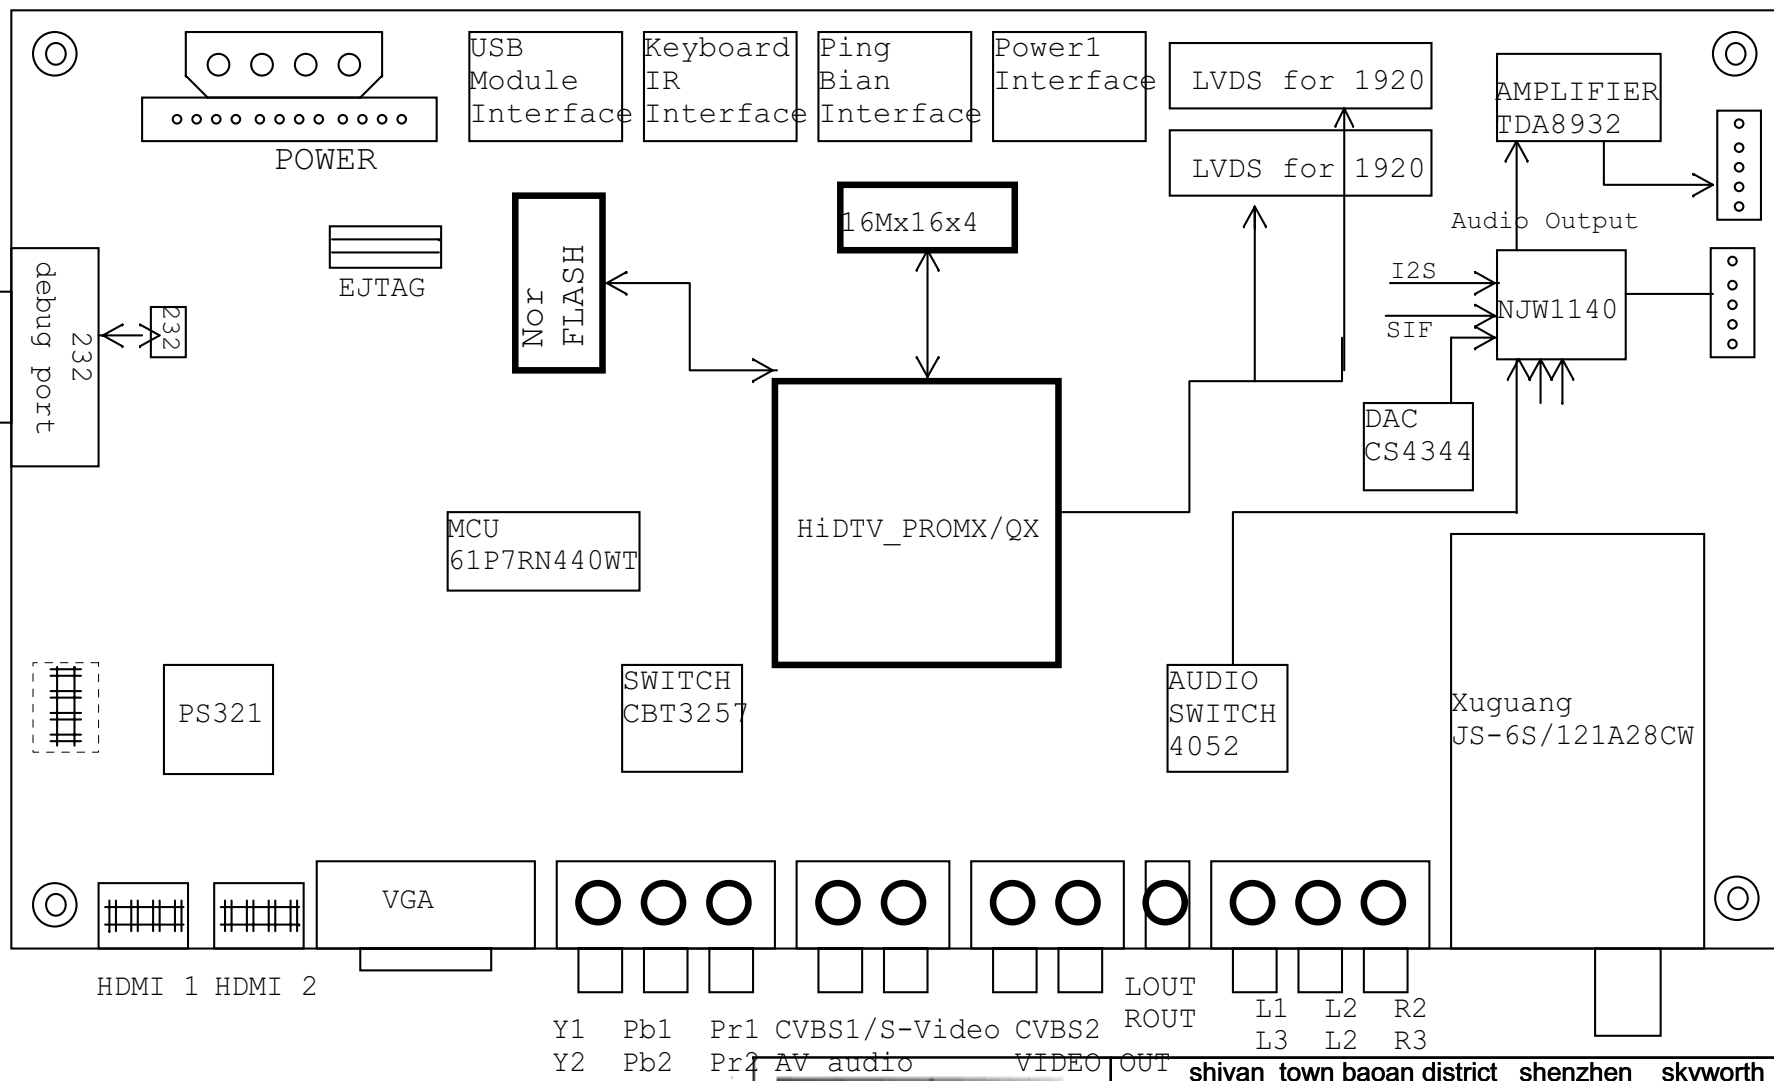

shiyantownbaodistrictshenzhen skyworth china			
thethirdinstituteTanglianman075526859374			
SIZE B	TRIDENT SVP QX	8DA5	VERSION A
wednesday	August 27, 2008	Sheet 19	of 19