



彩色电视机电路图 CIRCUIT DIAGRAM

型号
Model: KTN-5145

示意图
SCHEMATIC DIAGRAM

彩电维修资料网
TV160 彩电维修资料网
http://www.tv160.net
http://www.tv160.net

调谐器 TUNER

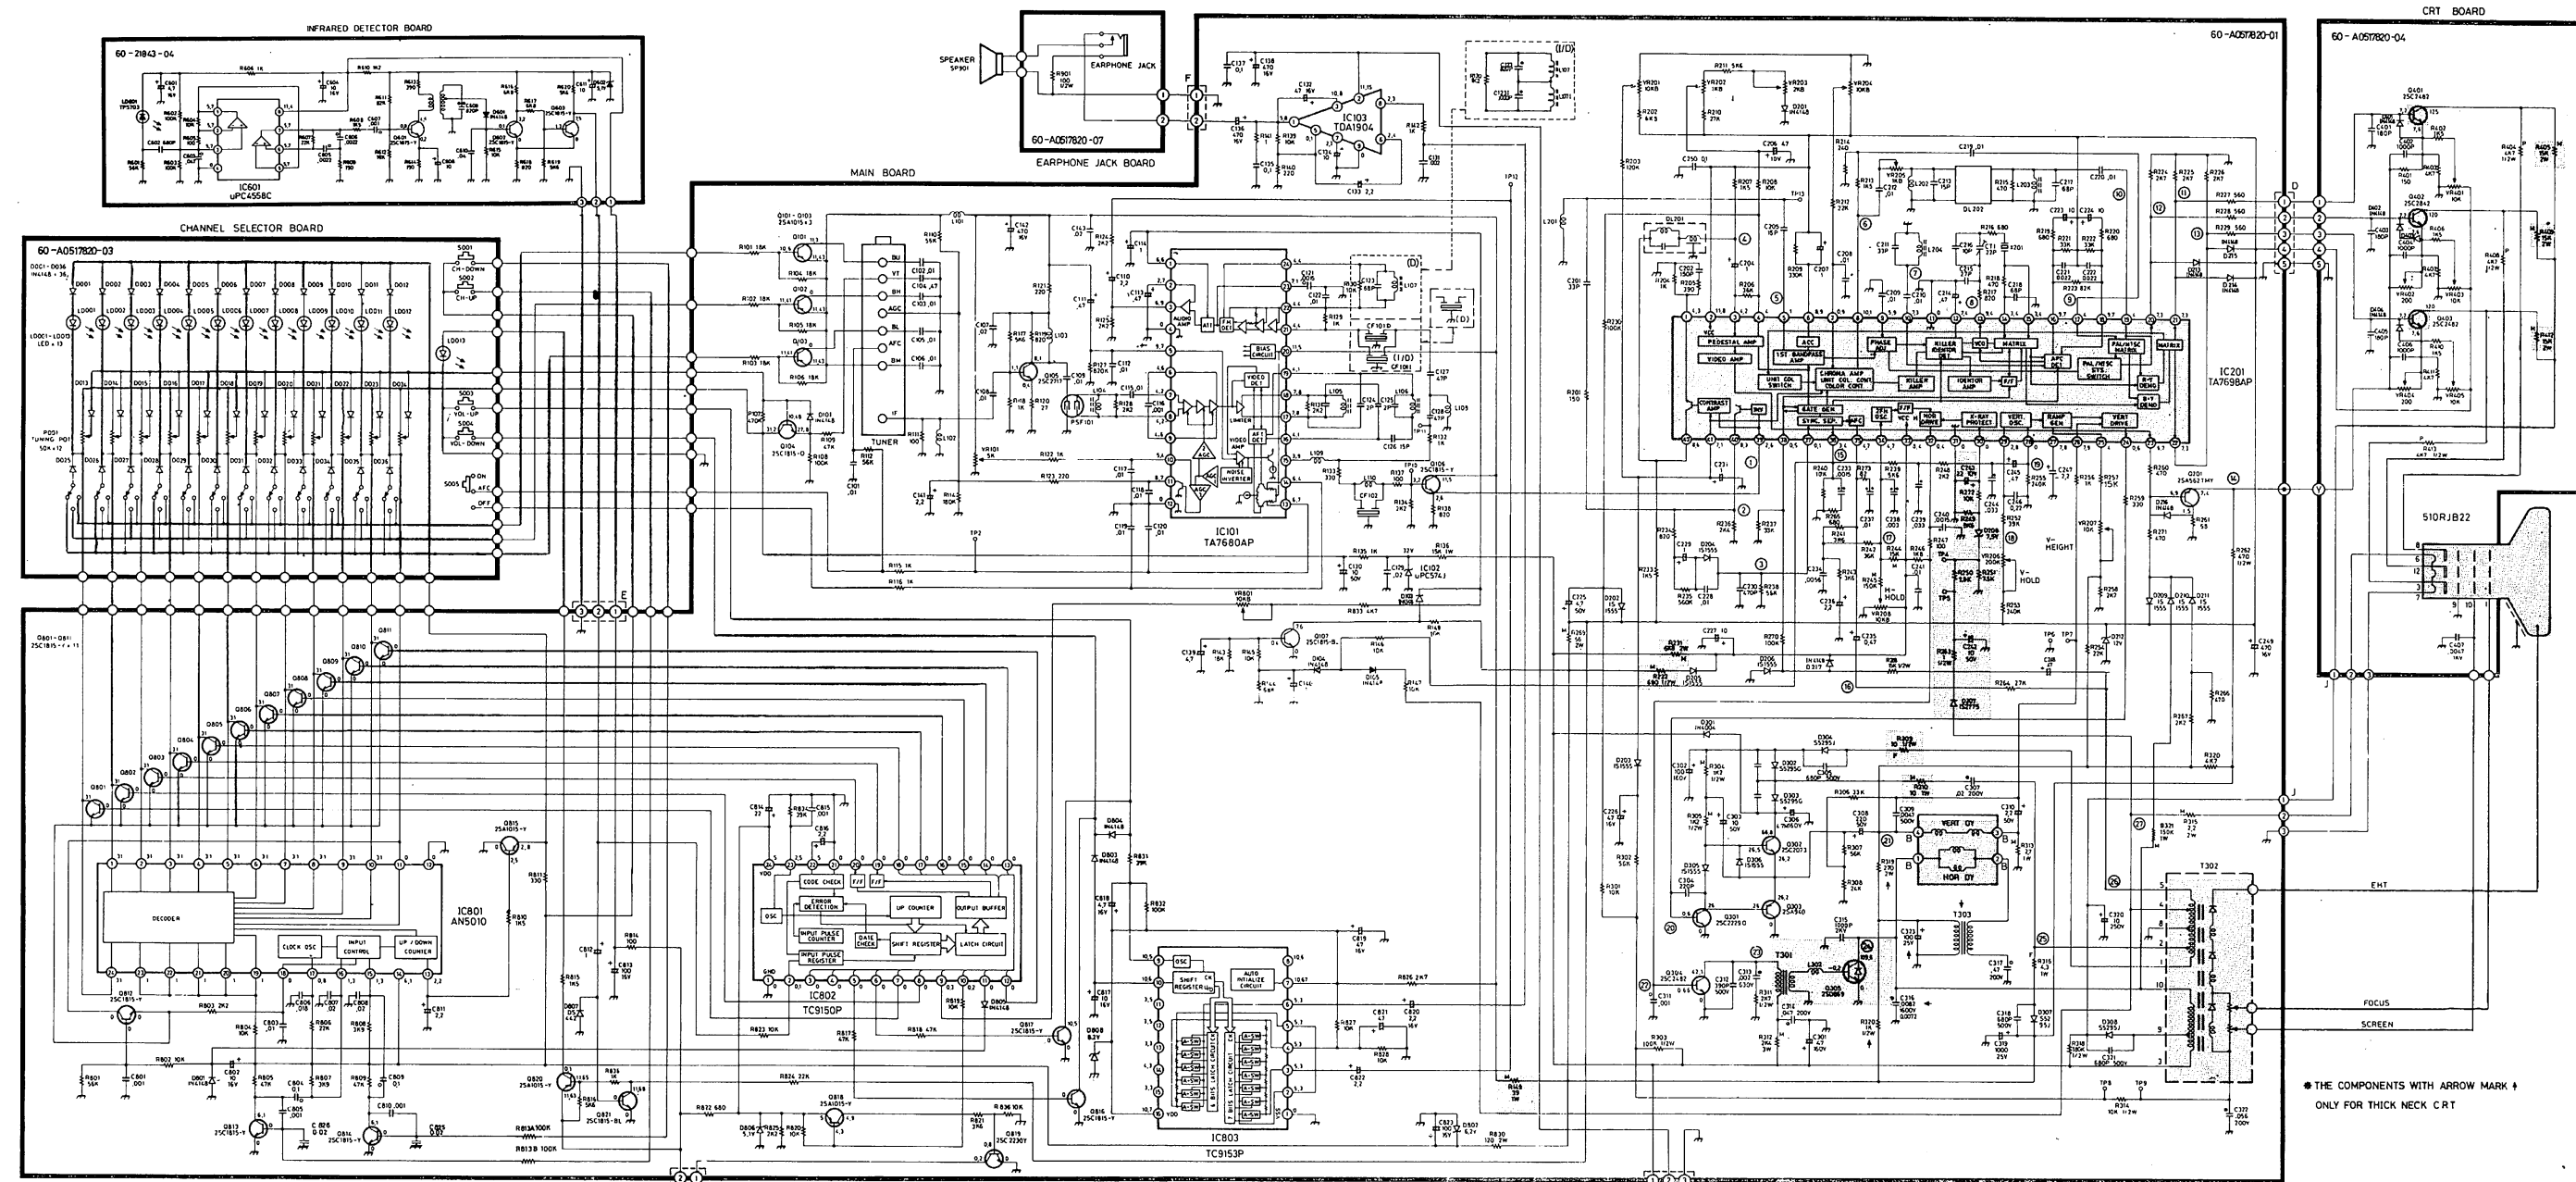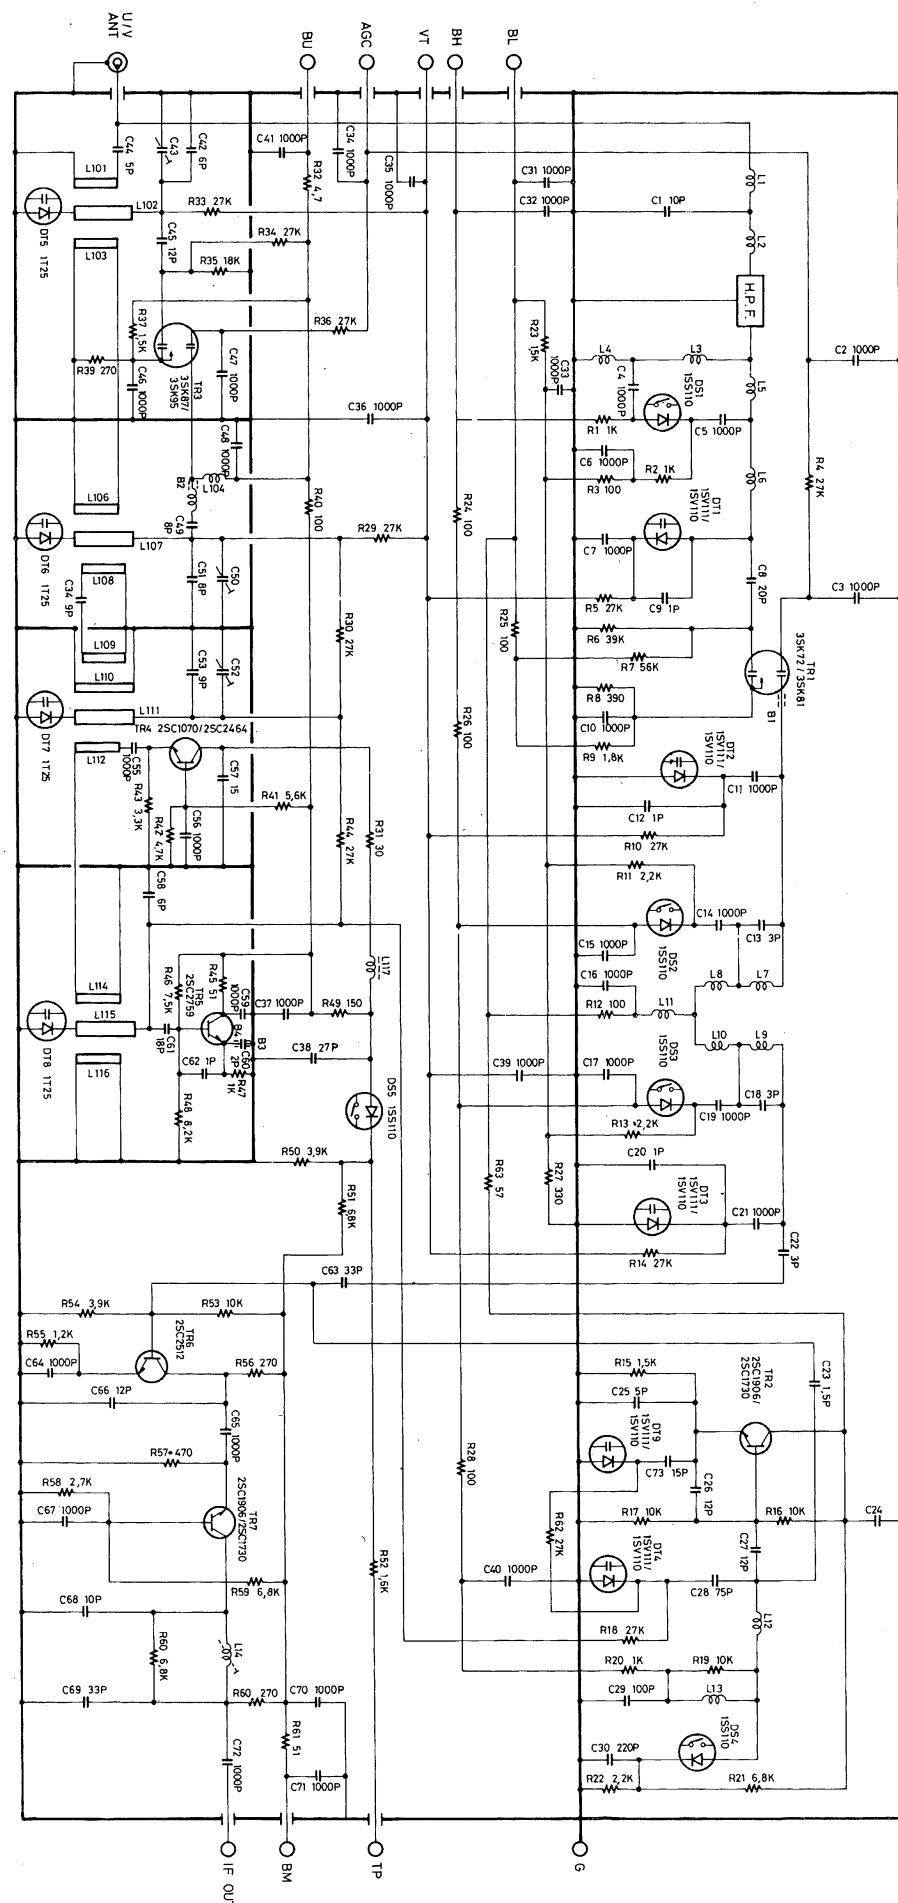

WARNING: Before servicing this chassis, read the X-RAY RADIATION PRECAUTION SAFETY PRECAUTION and PRODUCT SAFETY NOTICE of this manual.

CAUTION: The shaded areas in schematic diagram designate components which have special characteristics important for safety and should be replaced only with types identical to those in the original circuit or specified in the parts list. Before replacing any of these components, read carefully the PRODUCT SAFETY NOTICE of the manual. Do not degrade the safety of the receiver through improper servicing.

NOTE:

1. All D.C. voltages are measured under no signal input condition with a voltmeter having an impedance of at least 100k Ω /V
2. Waveforms are taken by referring to a standard colour bar signal applied at antenna input.
3. The circuit is subject to change without prior notice

EXPRESSION:

1. Resistor — All resistors are 1/4W ($\pm 5\%$) carbon film resistor unless otherwise noted with the following marks.




Unit resistance is in $(K=10^3)$
M = (10^6) ohm (Ω).

2. Capacitor — All capacitors are 50V ceramic capacitor unless otherwise noted with the following marks.

Unit capacitance is in MFD, unless otherwise marked.

Resistor	Symbol
Metal Oxide	
Fusible	
Non-Inflammable	
PTC Thermistor	
Carbon Composition	
Variable	
Carbon Film	

Capacitor	Symbol
AC Ceramic	
Polyester	
Metal Polyester	
Polypropylene	
Electrolytic	
Tantalum	
Trimmer	

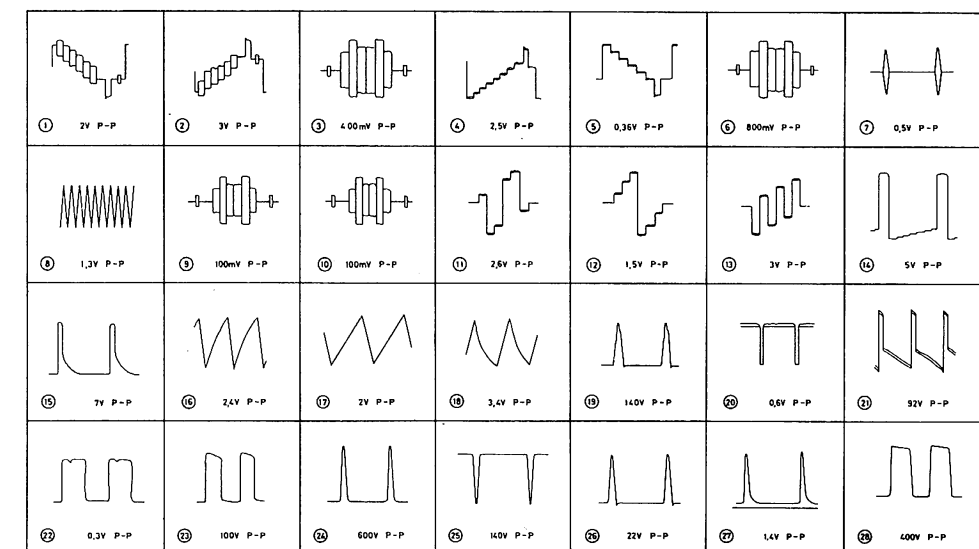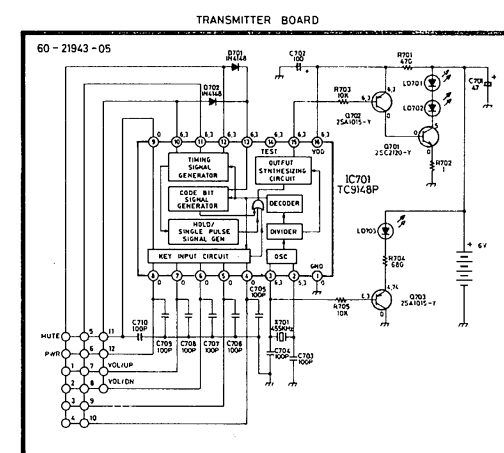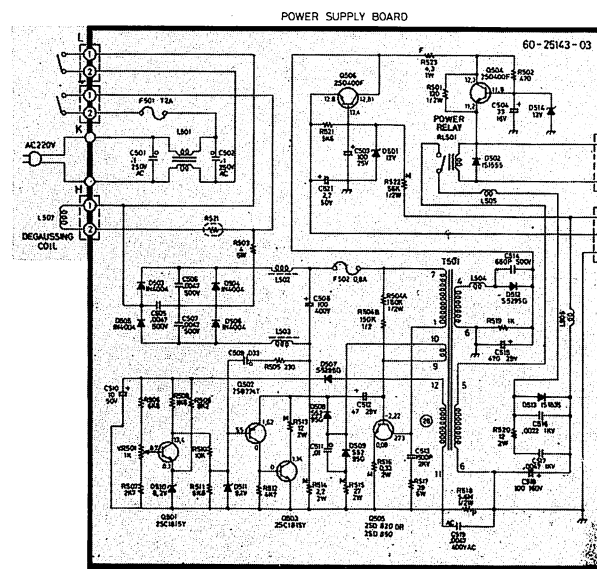

仅供参考。
如有变动，恕不另行通知。

10-51379-05

更多彩电维修资料请到《彩电维修资料网》<http://www.tv160.com> 查询!